


# FX-311 SERIES

## Manually Set Fiber Sensor

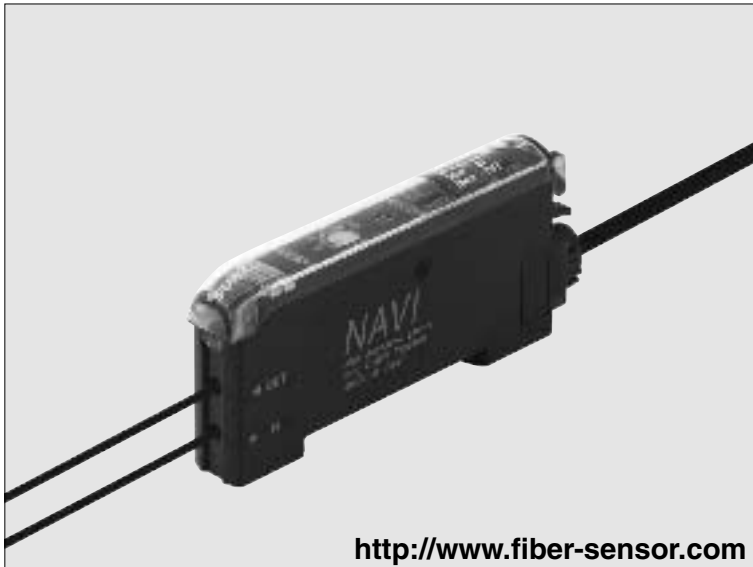

Highly sensitive manual tuning made easy

<http://www.fiber-sensor.com>



\* Passed the UL 991 Environment Test

\* UL 61010C-1 compatible, Passed the UL 991 Environment Test based on SEMI S2-0200.  
 [Category applicable for semiconductor manufacturing: TWW2, Process Equipment]  
 [Applicable standards: UL 61010C-1]  
 [Additional test / evaluation standards as per intended use: UL991, SEMI S2-0200]



### Long-range sensing made possible with built-in optical lens

For the first time in the industry, an optical 'double coupling lens' has been incorporated directly into the fiber sensor itself. This lens maximizes the light emission efficiency, resulting in a tremendous improvement in the sensing range. Sensing ranges with small diameter fibers and ultra-small diameter fibers, which have become very popular in recent years due to the miniaturization of chip components, have been increased by 50 % over previous values achieved with other amplifiers.

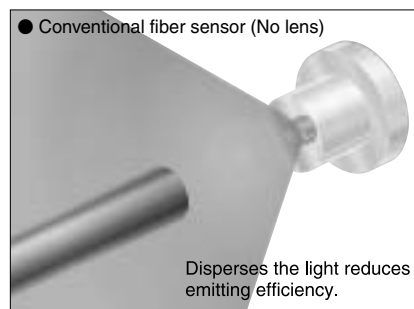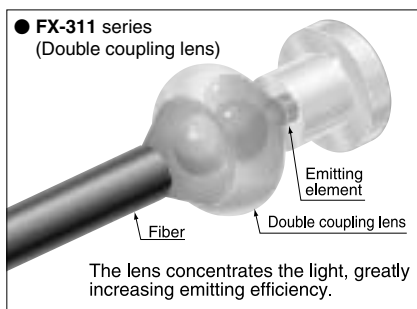

### Stable long-term sensing

The newly developed four-chemical emitting element that uses the FX-311 (red LED type) suppresses changes over long periods of time as much as possible, so that a stable light emitting level is maintained. There is very little element deterioration so that stable and accurate sensing can be maintained over long periods.

### Three light source types are made available for expanding applications

In addition to the red LED (four-chemical emitting element) type, the blue LED and green LED types are also available to conform to an even wider array of applications.

Color combinations that can be discerned during mark sensing


Mark color / Back ground color	White	Yellow	Orange	Red	Green	Blue	Black
White		■	■	■▲	●■▲	●■▲	●▲
Yellow	■		▲	▲	●■▲	●■▲	●▲
Orange	■	▲		■▲	●■▲	●■▲	●▲
Red	■▲	▲	■▲		●	●■	●■
Green	●■▲	●■▲	●■▲	●		■	■
Blue	●■▲	●■▲	●■▲	●■	■		■
Black	●■▲	●■▲	●■▲	●■	■	■	

●: Red LED ■: Blue LED ▲: Green LED

### 12-turn potentiometer with visible indicator

12-turn potentiometer has been incorporated for fine adjustments. It enables very fine differences to be detected.

Moreover, since the pointer of indicator has a red backlight, you can confirm the position at a glance, even in a dark area.




## Mode can be selected in three steps to suit the application

The mode select switch can change the mode to one of three modes to suit a variety of sensing applications.


<b>Long-range mode (LONG)</b>	Ideal for cases where long-distance sensing is required (Response time: 2 ms)
<b>Standard mode (STD)</b>	Used for general sensing (Response time: 250 $\mu$ s)
<b>High-speed mode (FAST) (Note)</b>	Ideal for cases where fast sensing is required (Response time: 150 $\mu$ s)
<b>Reduced intensity mode (S-D) (Note)</b>	Effective for fine detection (Response time: 250 $\mu$ s)

Note: High-speed mode is only available for the **FX-311B(P)** and **FX-311G(P)**. S-D (reduced intensity) mode is only available with the **FX-311(P)**.



## Maintenance made easy with quick-connection cables

Both main and sub units utilize the same amplifier body. This feature allows for easy mounting in side-by-side configuration. The main and sub unit functions are distinguished only by the proper use of the 3-core main cable and the 1-core sub cable. Moreover, by utilizing the same body for both main and sub units, inventory management and maintenance is simplified.

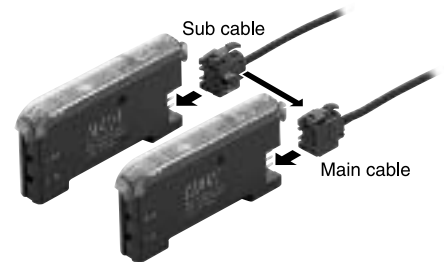

## Rapid blinking 'assist function' eases adjustment for optimum sensitivity

The **FX-311** series has a convenient built-in 'assist function' which indicates the optimum sensitivity position by blinking rapidly when optimum sensitivity is reached. This enables easy and reliable sensitivity adjustment, which is convenient for a narrow sensing range requiring fine tuning.

※In order enable the 'assist function', switch the operation selection switch from **L-ON**→**D-ON**→**L-ON**.

**1** Find the point (A) where the sensor is switched ON in the sensing condition.

**Sensing method** Sensing (beam received) condition

The pointer blinks once at point (A).

**2** In the non-sensing condition, turn the adjuster until ON state again, turn the adjuster counterclockwise and find the point (B) where it is switched OFF.

**Sensing method** Non-sensing (beam not received) condition

Confirm operation indicator lights up.

The pointer blinks twice at point (B).


**3** Optimum sensitivity point located.

Detectable range

The pointer blinks faster at optimum sensitivity.


## Close mounting is possible for up to four fiber heads

If amplifiers are mounted side-by-side in cascade, the optical communication function automatically sets different emission timing for the amplifiers, when the power supply is switched on. Up to four fiber heads can be mounted close together, without mutual interference. The **FX-301** series units can also be used in these configurations.

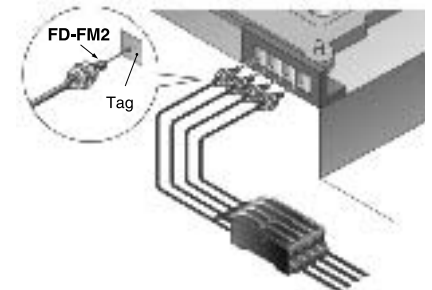

## Side-by-side connection with the FX-301 series / FX-302(P) is also possible for wire-saving and quick installation

Each sub cable is a single output wire, reducing wiring and simplifying installation. Quick-connection cables are the same type as used on the **FX-301** series / **FX-302(P)**, facilitating side-by-side connection. Furthermore, the connectors are sliding type, which allows them to be removed without shifting amplifier positions. This eliminates the need to provide extra maintenance space around the amplifiers.

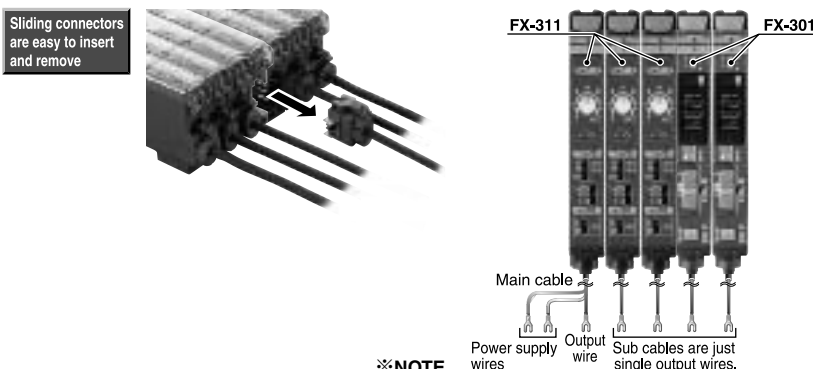

※NOTE  
Only the interference prevention settings can be transmitted between this product and digital fiber sensor **FX-301** series and **FX-302(P)**. Therefore, if both models of amplifiers are mounted in cascade, make sure to mount identical models together.


## OFF-delay timer with selectable timer period

The **FX-311** series incorporates an OFF-delay timer. It is useful when the connected device has a slow response time or when small objects are being sensed and the output signal width is small. You can select the timer period not only 40 ms but also 10 ms. It is also suitable for increased PLC speeds.


# FX-311

## APPLICATIONS


### Detecting register marks

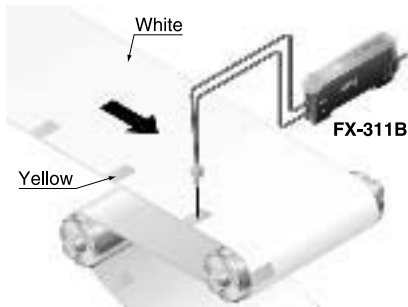

### Detecting transparent bottles

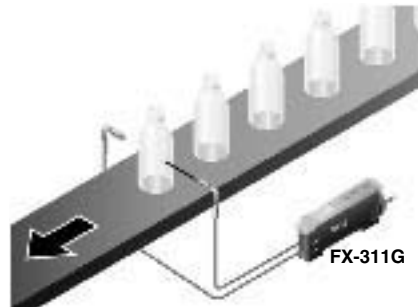

### Sensing the presence of a translucent sheet

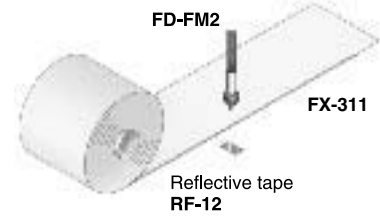

## ORDER GUIDE

**Amplifiers** Quick-connection cable is not supplied with the amplifier. Please order it separately.

Type	Appearance	Model No.	Emitting element	Output
Manually set NPN output PNP output		FX-311	Red LED	NPN open-collector transistor
		FX-311B	Blue LED	
		FX-311G	Green LED	
		FX-311P	Red LED	PNP open-collector transistor
		FX-311BP	Blue LED	
		FX-311GP	Green LED	

**Quick-connection cables** Quick-connection cable is not supplied with the amplifier. Please order it separately.


Type	Model No.	Description
Main cable	CN-73-C1	Length: 1 m 3.281 ft
	CN-73-C2	Length: 2 m 6.562 ft
	CN-73-C5	Length: 5 m 16.404 ft
Sub cable	CN-71-C1	Length: 1 m 3.281 ft
	CN-71-C2	Length: 2 m 6.562 ft
	CN-71-C5	Length: 5 m 16.404 ft

0.15 mm<sup>2</sup> 3-core cabtyre cable, with connector on one end  
Cable outer diameter:  $\phi$ 3 mm  $\phi$ 0.118 in

0.15 mm<sup>2</sup> 1-core cabtyre cable, with connector on one end  
Cable outer diameter:  $\phi$ 3 mm  $\phi$ 0.118 in


### Main cable

• CN-73-C□



### Sub cable

• CN-71-C□




**End plates** End plates are not supplied with the amplifier. Please order it separately when the amplifiers are mounted in cascade.

Appearance	Model No.	Description
	MS-DIN-E	When cascading multiple amplifiers, or when it moves depending on the way it is installed on a DIN rail, these end plates ensure that all amplifiers are mounted together in a secure and fully connected manner. Two pcs. per set


## OPTIONS

Designation	Model No.	Description
Amplifier mounting bracket	<b>MS-DIN-2</b>	Mounting bracket for amplifier
Hand-turned knob attached cover	<b>FX-AJ1</b>	Hand-turned knob allows easy adjustment of sensor sensitivity.
Fiber sensor amplifier protection seal	<b>FX-MB1</b>	10 sets of 2 communication window seals and 1 connector seal Communication window seal: It prevents malfunction due to transmission signal from another amplifier, as well as, prevents effect on another amplifier. Connector seal: It prevents contact of any metal, etc., with the pins of the quick-connection cable.


### Amplifier mounting bracket • MS-DIN-2



### Hand-turned knob attached cover • FX-AJ1



### Fiber sensor amplifier protection seal • FX-MB1



# FX-311

## LIST OF FIBERS

### General purpose fibers [Thru-beam type (one pair set)]



Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1)			Min. sensing object (under the optimum condition (Note 2))	Fiber cable length ✂: Free-cut	Allowable bending radius	Model No.
		Red LED	Blue LED	Green LED				
Long sensing range	With lens  M14	19,500 767.715 14,000 551.180 3,800 149.606 Not equipped with FAST mode	5,400 212.598 2,700 106.299 1,900 74.803 —	2,800 110.236 1,400 55.118 1,000 39.370 —	φ 0.4 mm φ 0.016 in opaque object	10 m 32.808 ft	R25 mm R0.984 in	FT-FM10L
	With lens  φ 2.5 φ 0.098	1,600 62.992 800 31.496 280 11.024 Not equipped with FAST mode	400 15.748 200 7.874 130 5.118 —	200 7.874 100 3.937 65 2.559 —	φ 0.02 mm φ 0.0008 in opaque object	2 m 6.562 ft		FT-SFM2L
	Lens mountable  M4	1,100 43.307 530 20.866 180 7.087 Not equipped with FAST mode	220 8.661 110 4.331 75 2.953 —	110 4.331 55 2.165 40 1.575 —	φ 0.04 mm φ 0.0016 in opaque object	2 m 6.562 ft		FT-B8
	Lens mountable  M4	1,000 39.37 480 18.898 168 6.614 Not equipped with FAST mode	200 7.874 100 3.937 70 2.756 —	100 3.937 50 1.969 35 1.378 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft (Note 3)		FT-NB8
Standard	Lens mountable  M4	780 30.709 400 15.748 130 5.118 Not equipped with FAST mode	150 5.906 75 2.953 40 1.575 —	70 2.756 35 1.378 24 0.945 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-FM2
	Sleeve 90 mm 3.543 in  M4 φ 1.48 φ 0.058	780 30.709 400 15.748 130 5.118 Not equipped with FAST mode	150 5.906 75 2.953 40 1.575 —	70 2.756 35 1.378 24 0.945 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft	Fiber R25 mm R0.984 in Sleeve R10 mm R0.394 in	FT-FM2S
	Sleeve 40 mm 1.575 in  M4 φ 1.48 φ 0.058	780 30.709 400 15.748 130 5.118 Not equipped with FAST mode	150 5.906 75 2.953 40 1.575 —	70 2.756 35 1.378 24 0.945 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft	FT-FM2S4	
	Lens mountable  M3	700 27.559 360 14.173 126 4.961 Not equipped with FAST mode	140 5.512 70 2.756 40 1.575 —	66 2.598 33 1.299 22 0.866 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft (Note 3)	R25 mm R0.984 in	FT-T80
	Lens mountable  φ 2.5 φ 0.098	700 27.559 360 14.173 126 4.961 Not equipped with FAST mode	140 5.512 70 2.756 40 1.575 —	66 2.598 33 1.299 22 0.866 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft (Note 3)	R25 mm R0.984 in	FT-SFM2
	Lens mountable  M4	700 27.559 360 14.173 126 4.961 Not equipped with FAST mode	140 5.512 70 2.756 40 1.575 —	66 2.598 33 1.299 22 0.866 —	φ 0.03 mm φ 0.0012 in opaque object	2 m 6.562 ft (Note 3)	R25 mm R0.984 in	FT-N8
	Lens mountable  M3	270 10.630 140 5.512 49 1.929 Not equipped with FAST mode	50 1.969 25 0.984 16 0.630 —	24 0.945 12 0.472 8 0.315 —	φ 0.025 mm φ 0.0010 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-NFM2
	Sleeve 90 mm 3.543 in  M3 φ 0.88 φ 0.035	270 10.630 140 5.512 49 1.929 Not equipped with FAST mode	50 1.969 25 0.984 16 0.630 —	24 0.945 12 0.472 8 0.315 —	φ 0.025 mm φ 0.0010 in opaque object	2 m 6.562 ft	Fiber R25 mm R0.984 in Sleeve R10 mm R0.394 in	FT-NFM2S
	Sleeve 40 mm 1.575 in  M3 φ 0.88 φ 0.035	270 10.630 140 5.512 49 1.929 Not equipped with FAST mode	50 1.969 25 0.984 16 0.630 —	24 0.945 12 0.472 8 0.315 —	φ 0.025 mm φ 0.0010 in opaque object	2 m 6.562 ft	FT-NFM2S4	
	Lens mountable  φ 1.5 φ 0.059	530 20.866 230 9.055 80 3.150 Not equipped with FAST mode	85 3.346 42 1.654 28 1.102 —	44 1.732 22 0.866 16 0.630 —	φ 0.04 mm φ 0.0016 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-SNFM2
Elbow  M4	530 20.866 230 9.055 80 3.150 Not equipped with FAST mode	85 3.346 42 1.654 28 1.102 —	44 1.732 22 0.866 16 0.630 —	φ 0.04 mm φ 0.0016 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-R80	
Side-view	Lens mountable  φ 4 φ 0.157 φ 0.118	2,000 78.740 1,000 39.370 350 13.780 Not equipped with FAST mode	400 15.748 200 7.874 130 5.118 —	200 7.874 100 3.937 65 2.559 —	φ 0.05 mm φ 0.0020 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-V10 <sup>New</sup>
	Lens mountable  φ 1.5 φ 0.059 φ 2.5 φ 0.098 φ 0.8 φ 0.031	400 15.748 200 7.874 80 3.150 Not equipped with FAST mode	80 3.150 40 1.575 28 1.102 —	40 1.575 20 0.787 14 0.551 —	φ 0.05 mm φ 0.0020 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-SFM2SV2
	Lens mountable  φ 1 φ 0.039 φ 2 φ 0.079 φ 0.6 φ 0.024	390 15.354 180 7.087 63 2.480 Not equipped with FAST mode	50 1.969 25 0.984 16 0.630 —	26 1.024 13 0.512 8 0.315 —	φ 0.02 mm φ 0.0008 in opaque object	1 m 3.281 ft	R25 mm R0.984 in	FT-V22
	Lens mountable  φ 1 φ 0.039 φ 2.5 φ 0.098 φ 0.6 φ 0.024	175 6.890 80 3.150 27 1.063 Not equipped with FAST mode	28 1.102 14 0.551 10 0.394 —	14 0.551 7 0.276 5 0.197 —	φ 0.02 mm φ 0.0008 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-V41

- Notes: 1) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.  
 2) The minimum sensing object size is the value for red LED type. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.  
 The optimum condition is the condition when the sensitivity is set so that the output just changes to light incident operation in the object absent condition.  
 3) The fiber cutter is not attached with FT-NB8 and FT-N8. Please order it separately.

## LIST OF FIBERS

### Sharp bending fibers / Flexible fibers [Thru-beam type (one pair set)]



Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1)			Min. sensing object (under the optimum condition (Note 2))	Fiber cable length Free-cut	Allowable bending radius	Model No.	
		Red LED	Blue LED	Green LED					
Sharp bending	Wide beam	Wide area sensing Sensing width 32 mm 1.260 in W5 X H69 X D20 W0.197 X H2.717 X D0.787	3,500 137.795 Not equipped with FAST mode 3,500 137.795 (Note 3)	2,400 94.488 1,200 47.244 700 27.559	1,200 47.244 600 23.622 350 13.780	φ0.3 mm φ0.012 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-WA30 <i>New</i>
		Wide area sensing Sensing width 11 mm 0.433 in W4.2 X H31 X D13.5 W0.165 X H1.22 X D0.531	3,500 137.795 Not equipped with FAST mode 1,500 59.055 750 29.528	600 23.622 300 11.811 220 8.661	300 1.811 150 5.906 110 4.331	φ0.25 mm φ0.010 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-WA8 <i>New</i>
	Rectangular head	Easy mounting - Top sensing W3 X H8 X D12 W0.118 X H0.315 X D0.472	2,500 98.425 1,200 47.244 Not equipped with FAST mode 410 16.142	400 15.748 200 7.874 140 5.512	200 7.874 100 3.937 70 2.756	φ0.08 mm φ0.003 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-WZ8H <i>New</i>
		Easy mounting - Side sensing W3 X H12 X D8 W0.118 X H0.472 X D0.315	1,500 59.055 700 27.559 Not equipped with FAST mode 210 8.268	240 9.449 120 4.724 80 3.150	120 4.724 60 2.362 40 1.575	φ0.05 mm φ0.0020 in opaque object			FT-WZ8E <i>New</i>
		Easy mounting - Front sensing W8.5 X H12 X D3 W0.335 X H0.472 X D0.118	700 27.559 330 12.992 Not equipped with FAST mode 120 4.724	80 3.150 40 1.575 25 0.984	40 1.575 20 0.787 13 0.512	φ0.04 mm φ0.0016 in opaque object			FT-WZ8 <i>New</i>
	Narrow beam	Side-view type with small light dispersion φ4 φ0.157 φ3 φ0.118	1,700 66.929 700 27.559 Not equipped with FAST mode 300 11.811	300 11.811 150 5.906 100 3.937	160 6.299 80 3.150 60 2.362	φ0.06 mm φ0.0024 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-WKV8 <i>New</i>
		Long sensing range - With lens φ3 φ0.118	1,200 47.244 600 23.622 Not equipped with FAST mode 210 8.268	240 9.449 120 4.724 90 3.543	120 4.724 60 2.362 40 1.575	φ0.02 mm φ0.0008 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-WS8L
	Standard	Lens mountable M4 φ3 φ0.118	570 22.441 290 11.417 Not equipped with FAST mode 100 3.937	90 3.543 45 1.575 30 1.181	56 2.205 28 1.102 20 0.787	φ0.03 mm φ0.0012 in opaque object φ0.05 mm φ0.0020 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-W8
		φ2.5 φ0.098	φ0.03 mm φ0.0012 in opaque object	FT-WS3 <i>New</i>					
		φ2.5 φ0.098	φ0.03 mm φ0.0012 in opaque object	FT-WS8					
	Small diameter	M3 φ1.5 φ0.059	160 6.299 80 3.15 Not equipped with FAST mode 28 1.102	16 0.630 8 0.315 5 0.197	10 0.394 5 0.197 3 0.118	φ0.02 mm φ0.0008 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-W4
		φ1.5 φ0.059	FT-WS4						
Side-view	φ1 φ0.039 φ2 φ0.079 Sleeve part cannot be bent. φ15 0.591	90 3.543 40 1.575 Not equipped with FAST mode 15 0.591	— — — —	— — — —	φ0.02 mm φ0.0008 in opaque object	2 m 6.562 ft	R1 mm R0.039 in	FT-WV42 <i>New</i>	
Flexible	Rectangular head	Easy mounting - Top sensing W3 X H8 X D12 W0.118 X H0.315 X D0.472	2,700 106.299 1,400 55.118 Not equipped with FAST mode 490 19.291	560 22.047 280 11.024 200 7.874	200 7.874 100 3.937 65 2.559	φ0.03 mm φ0.0012 in opaque object	2 m 6.562 ft	R4 mm R0.157 in	FT-Z8H
		Easy mounting - Side sensing W3 X H12 X D8 W0.118 X H0.472 X D0.315	1,600 62.992 800 31.496 Not equipped with FAST mode 280 11.024	400 15.748 200 7.874 140 5.512	200 7.874 100 3.937 65 2.559				FT-Z8E
		Easy mounting - Front sensing W8.5 X H12 X D3 W0.335 X H0.472 X D0.118	800 31.496 400 15.748 Not equipped with FAST mode 140 5.512	120 4.724 60 2.362 40 1.575	60 2.362 30 1.181 22 0.866				FT-Z8
	Standard	Lens mountable M4 φ3 φ0.118	650 25.591 320 12.598 Not equipped with FAST mode 110 4.331	130 5.118 65 2.559 45 1.772	70 2.756 35 1.378 25 0.984	φ0.04 mm φ0.0016 in opaque object	2 m 6.562 ft	R4 mm R0.157 in	FT-P80
		Lens mountable M4 φ3 φ0.118	400 15.748 190 7.48 Not equipped with FAST mode 80 3.15	50 1.969 25 0.984 18 0.709	26 1.024 13 0.512 8 0.315	FT-P60 <i>New</i>			
	Small diameter	M3 φ1.5 φ0.059	250 9.843 100 3.937 Not equipped with FAST mode 35 1.378	32 1.260 16 0.630 12 0.472	18 0.709 9 0.354 7 0.276	φ0.02 mm φ0.0008 in opaque object	2 m 6.562 ft	R4 mm R0.157 in	FT-P40
		φ1.5 φ0.059	280 11.024 120 4.724 Not equipped with FAST mode 42 1.654	36 1.417 18 0.709 14 0.551	20 0.787 10 0.394 8 0.315				FT-P2
		φ1 φ0.039	80 3.15 40 1.575 Not equipped with FAST mode 17 0.669	14 0.551 7 0.276 4 0.157	6 0.236 3 0.118 2 0.079				FT-PS1 <i>New</i>

Notes: 1) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.  
 2) The minimum sensing object size is the value for red LED type. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.  
 The optimum condition is the condition when the sensitivity is set so that the sensing output just changes to light incident operation in the object absent condition.  
 3) The fiber cable length practically limits the sensing range to 3,500 mm (137.795 in) in long.

# FX-311

## LIST OF FIBERS

### Special use fibers [Thru-beam type (one pair set)]




Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1)			Min. sensing object (under the optimum condition (Note 2))	Fiber cable length ✂: Free-cut	Allowable bending radius	Model No.
		Red LED	Blue LED	Green LED				
Special use	Wide beam 	3,500 137.795	2,400 94.488	1,200 47.244	φ 0.3 mm φ 0.012 in opaque object	✂ 2 m 6.562 ft	R10 mm R0.394 in	FT-A30 <i>New</i>
		Not equipped with FAST mode	1,200 47.244	600 23.622				
		3,500 137.795 (Note 3)	700 27.559	350 13.780				
	Wide beam 	3,500 137.795	600 23.622	300 11.811	φ 0.25 mm φ 0.010 in opaque object	✂ 2 m 6.562 ft	R10 mm R0.394 in	FT-A8
		Not equipped with FAST mode	300 11.811	150 5.906				
		1,500 59.055	220 8.661	110 4.331				
	Array 	650 25.591	120 4.724	60 2.362	Horizontal: φ 0.025 mm φ 0.001 in opaque object Vertical: φ 0.45 mm φ 0.018 in opaque object	✂ 2 m 6.562 ft	R25 mm R0.984 in	FT-AFM2
		Not equipped with FAST mode	60 2.362	30 1.181				
		115 4.528	40 1.575	20 0.787				
	Array 	590 23.228	120 4.724	60 2.362				FT-AFM2E
		Not equipped with FAST mode	60 2.362	30 1.181				
		290 11.417	40 1.575	20 0.787				
Narrow beam 	2,000 78.740	400 15.748	200 7.874	φ 0.06 mm φ 0.0024 in opaque object	✂ 2 m 6.562 ft	R25 mm R0.984 in	FT-K8	
	Not equipped with FAST mode	200 7.874	100 3.937					
	1,000 39.370	130 5.118	65 2.559					
Narrow beam 	350 13.780						FT-KV8	
	Not equipped with FAST mode							
	350 13.780							
Narrow beam 	500 19.685	80 3.150	—	φ 0.02 mm φ 0.0008 in opaque object	✂ 2 m 6.562 ft	R10 mm R0.394 in	FT-KV1 <i>New</i>	
	Not equipped with FAST mode	35 1.378	—					
	250 9.843	10 0.394	—					
Ultra-small diameter 	18 0.709	3 0.118	1 0.039	φ 0.02 mm φ 0.0008 in opaque object	500 mm 19.685 in	R5 mm R0.197 in	FT-E12	
	Not equipped with FAST mode	2 0.079	—					
	3 0.118	1 0.039	—					
Ultra-small diameter 	80 3.150	14 0.551	6 0.236		1 m 3.281 ft		FT-E22	
	Not equipped with FAST mode	7 0.276	3 0.118					
	50 1.969	4 0.157	2 0.079					
Tough flexible 	650 25.591	130 5.118	64 2.520	φ 0.05 mm φ 0.0020 in opaque object	1 m 3.281 ft	R10 mm R0.394 in	FT-P81X <i>New</i>	
	Not equipped with FAST mode	64 2.520	32 1.206					
	320 12.598	45 1.772	22 0.866					
		110 4.331	—					

- Notes: 1) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.  
 2) The minimum sensing object size is the value for red LED type. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.  
 The optimum condition is the condition when the sensitivity is set so that the sensing output just changes to light incident operation in the object absent condition.  
 3) The fiber cable length practically limits the sensing range to 3,500 mm 137.795 in long.

## LIST OF FIBERS

### Environment resistant fibers [Thru-beam type (one pair set)]



Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1)			Min. sensing object (under the optimum condition (Note 2))	Fiber cable length (Free-cut)	Allowable bending radius	Model No.					
		Red LED	Blue LED	Green LED									
Environment resistant	350 °C 662 °F Lens mountable 	550 21.654 280 11.024	100 3.937 50 1.969 35 1.378	50 1.969 25 0.984 18 0.709	φ0.04 mm φ0.0016 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-H35-M2					
	350 °C 662 °F Sleeve 60 mm 2.362 in M4 φ2.1 φ0.083 	Not equipped with FAST mode 90 3.543	—	—					Fiber R25 mm R0.984 in Sleeve R10 mm R0.394 in	FT-H35-M2S6			
	Heat-resistant	Allows flexible wiring 200 °C 392 °F Lens mountable 	310 12.205 140 5.512	44 1.732 22 0.866 14 0.551	22 0.866 11 0.433 7 0.276	φ0.02 mm φ0.0008 in opaque object	1 m 3.281 ft	R10 mm R0.394 in	FT-H20W-M1				
		200 °C 392 °F Lens mountable 	Not equipped with FAST mode 50 1.969	—	—		2 m 6.562 ft	FT-H20W-M2					
	Heat-resistant	200 °C 392 °F Lens mountable 	550 21.654 280 11.024 90 3.543	100 3.937 50 1.969 35 1.378	50 1.969 25 0.984 18 0.709	φ0.04 mm φ0.0016 in opaque object	1 m 3.281 ft	R25 mm	FT-H20-M1				
		130 °C 266 °F Lens mountable 	880 34.646 440 17.323 155 6.102	72 2.835 36 1.417 26 1.024	32 1.260 16 0.630 10 0.394					φ0.06 mm φ0.0024 in opaque object	2 m 6.562 ft	R0.984 in	FT-H13-FM2
	Chemical-resistant	Easy mounting · Rectangular head SEMI S2 compliant W7 X H15 X D13 W0.278 X H0.591 X D0.512 	3,500 137.795 1,500 59.055 530 20.866	320 12.598 160 6.299 120 4.724	160 6.299 80 3.150 60 2.362	φ4 mm φ0.157 in opaque object	2 m 6.562 ft	R25 mm R0.984 in	FT-Z802Y				
		φ5.5 φ0.217 	3,500 137.795 1,500 59.055 530 20.866	160 6.299 80 3.150 50 1.969	160 6.299 80 3.150 50 1.969					φ0.08 mm φ0.003 in opaque object	2 m 6.562 ft (Note 3)	R30 mm R1.181 in	FT-L8Y
		Side-view φ5.5 φ0.217 	800 31.496 400 15.748 140 5.512	120 4.724 60 2.362 35 1.378	80 3.150 40 1.575 25 0.984								
	Vacuum	Lens mountable 	470 18.504 230 9.055 80 3.150	100 3.937 50 1.969 30 1.181	46 1.811 23 0.906 16 0.630	φ0.02 mm φ0.0008 in opaque object	1 m 3.281 ft	R200 mm R7.874 in	FT-6V				
Not equipped with FAST mode 		220 8.661 100 3.937 35 1.378	36 1.417 18 0.709 12 0.472	18 0.709 9 0.354 6 0.236	R30 mm R1.181 in			FT-60V					

Notes: 1) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.  
 2) The minimum sensing object size is the value for red LED type. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.  
 The optimum condition is the condition when the sensitivity is set so that the sensing output just changes to light incident operation in the object absent condition.  
 3) The allowable cutting range is 500 mm 19.685 in from the end that the amplifier inserted.

### The vacuum type fiber must be used with the following products as a set.

- FT-J6: Fiber at atmospheric side (one pair set)
- FV-BR1: Photo-terminal (one pair set)

### Semi-standard fibers (Custom made per order)


The fiber cable length or sleeve length of the standard fibers can be modified at your request. Select the fiber cable length (symbol ☒) or the sleeve length (symbol ☐) from the table below.

Type	Basic model No.	☒ Fiber cable length (Unit: m ft)	☐ Sleeve length (Unit: cm in)
Standard threaded head (free-cut)	FT-FM ☒	3 9.843, 4 13.123, 5 16.404, 10 32.808, 15 49.213, 20 65.617, 25 82.021, 30 98.425	—
	With sleeve FT-FM ☒-S ☐	2 6.562 (Note), 3 9.843, 4 13.123, 5 16.404, 10 32.808, 15 49.213, 20 65.617, 25 82.021, 30 98.425	1 0.394, 2 0.787, 3 1.181, 4 1.575, 5 1.969, 6 2.362, 7 2.756, 8 3.15, 9 3.543, 10 3.937, 11 4.331, 12 4.724
With large diameter lens	FT-FM ☒ L	20 65.617, 30 98.425	—
Small diameter threaded head with sleeve (free-cut)	FT-NFM2-S ☐	—	1 0.394, 2 0.787, 3 1.181, 4 1.575, 5 1.969, 6 2.362, 7 2.756, 8 3.15, 9 3.543, 10 3.937, 11 4.331, 12 4.724
Wide beam	FT-WA30-☒	5 16.404	—
	FT-A30-☒		—
	FT-WA8-☒		—
	FT-A8-☒		—
200°C 392°F heat-resistant	FT-H20-M ☒	2 0.079, 3 0.118	—
350°C 662°F heat-resistant	FT-H35-M ☒	3 0.118	—
Chemical-resistant	FT-Z80 ☒ Y	5 0.197, 7 0.276	—

Note: The standard fiber has a 2 m 6.562 ft fiber cable length and a 4 cm 1.575 in or 9 cm 3.543 in sleeve length.

### Correlation between sensing range attenuation coefficient and fiber cable length

The longer the fiber cable, the shorter the sensing range.

























































# FX-311

## LIST OF FIBERS

### General purpose fibers [Reflective type]

Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1, 2)			Min. sensing object (at the maximum sensitivity (Note 3))	Fiber cable length  : Free-cut	Allowable bending radius	Model No.
		Red LED	Blue LED	Green LED				
Standard	 M6 Coaxial	 480 18.898  220 8.661 Not equipped with FAST mode  75 2.953	80 3.150 40 1.575 26 1.024 —	42 1.654 21 0.827 14 0.551 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-B8
		 310 12.205  140 5.512 Not equipped with FAST mode  47 1.850	46 1.811 23 0.906 15 0.591 —	24 0.945 12 0.472 8 0.315 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	500 mm 19.685 ft  2 m 6.562 ft	R25 mm R0.984 in	FD-5
		 270 10.630  110 4.331 Not equipped with FAST mode  39 1.535	46 1.811 23 0.906 15 0.591 —	24 0.945 12 0.472 8 0.315 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	Fiber R25 mm R0.984 in Sleeve R10 mm R0.394 in	FD-FM2S
	 270 10.630  110 4.331 Not equipped with FAST mode  39 1.535	46 1.811 23 0.906 15 0.591 —	24 0.945 12 0.472 8 0.315 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-FM2S4	
	 270 10.630  110 4.331 Not equipped with FAST mode  39 1.535	46 1.811 23 0.906 15 0.591 —	24 0.945 12 0.472 8 0.315 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-T80	
	 90 3.543  45 1.772 Not equipped with FAST mode  16 0.630	16 0.630 8 0.315 5 0.197 —	8 0.315 4 0.157 2 0.079 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-T40	
	 270 10.630  110 4.331 Not equipped with FAST mode  39 1.535	46 1.811 23 0.906 15 0.591 —	24 0.945 12 0.472 8 0.315 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-S80	
	 260 10.236  120 4.724 Not equipped with FAST mode  42 1.654	46 1.811 23 0.906 15 0.591 —	24 0.945 12 0.472 8 0.315 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft (Note 4)	R25 mm R0.984 in	FD-N8	
	 75 2.953  38 1.496 Not equipped with FAST mode  13 0.512	16 0.630 8 0.315 5 0.197 —	8 0.315 4 0.157 2 0.079 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-N4	
	 90 3.543  45 1.772 Not equipped with FAST mode  16 0.630	16 0.630 8 0.315 5 0.197 —	8 0.315 4 0.157 2 0.079 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-NFM2	
	 90 3.543  45 1.772 Not equipped with FAST mode  16 0.630	16 0.630 8 0.315 5 0.197 —	8 0.315 4 0.157 2 0.079 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	Fiber R25 mm R0.984 in Sleeve R10 mm R0.394 in	FD-NFM2S	
	 90 3.543  45 1.772 Not equipped with FAST mode  16 0.630	16 0.630 8 0.315 5 0.197 —	8 0.315 4 0.157 2 0.079 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-NFM2S4	
	 185 7.283  85 3.346 Not equipped with FAST mode  30 1.181	32 1.260 16 0.630 10 0.394 —	16 0.630 8 0.315 5 0.197 —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-SNFM2	
	100 3.937  45 1.772 Not equipped with FAST mode  16 0.630	14 0.551 7 0.276 4 0.157 —	7 0.276 3.5 0.138 — —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-R80	
	55 2.165  25 0.984 Not equipped with FAST mode  9 0.354	6 0.236 3 0.118 — —	3 0.118 — — —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-SFM2SV2	
	55 2.165  25 0.984 Not equipped with FAST mode  9 0.354	6 0.236 3 0.118 — —	3 0.118 — — —	$\phi$ 0.02 mm $\phi$ 0.0008 in gold wire	 2 m 6.562 ft	R25 mm R0.984 in	FD-V41	

Notes: 1) The sensing range is specified for white non-glossy paper (FD-B8, FD-5, FD-FM2, FD-FM2S, FD-FM2S4, FD-N8, FD-T80, FD-S80 and FD-R80: 400 × 400 mm 15.748 × 15.748 in, FD-T40, FD-N4, FD-NFM2, FD-NFM2S, FD-NFM2S4, FD-SNFM2, FD-SFM2SV2 and FD-V41: 200 × 200 mm 7.874 × 7.874 in) as the object.

2) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

3) The minimum sensing object size is the value for red LED type at maximum sensitivity. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.

Also, note that the corresponding setting distance is different from the rated sensing distance.

4) The fiber cutter is not attached with FD-N8 and FD-N4. Please order it separately.

## LIST OF FIBERS

### Sharp bending fibers / Flexible fibers [Reflective type]

Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1, 2)			Min. sensing object at the maximum sensitivity (Note 3)	Fiber cable length ☒ : Free-cut	Allowable bending radius	Model No.			
		Red LED	Blue LED	Green LED							
Sharp bending	Rectangular head W5.2×H8.5×D15 (W0.205×H0.374×D0.591)	20 to 480 0.787 to 18.898 20 to 230 0.787 to 9.055 Not equipped with FAST mode 25 to 100 0.984 to 3.937	—	—	φ0.3 mm φ0.012 in copper wire	2 m 6.562 ft	R1 mm R0.039 in	<b>FD-WKZ1</b> <i>New</i>			
		190 7.480 90 3.543 Not equipped with FAST mode 32 1.260	23 0.906 11 0.433 8 0.315	14 0.551 7 0.276 4 0.157				φ0.02 mm φ0.0008 in gold wire	2 m 6.562 ft	R1 mm R0.039 in	<b>FD-W8</b>
	Sleeve 40 mm 1.575 in M4 φ1.48 φ0.058	30 1.181 15 0.591 Not equipped with FAST mode 5 0.197	5 0.197 2.5 0.098 1.5 0.059	3 0.118 1.5 0.059 1 0.039	Fiber R1 mm R0.039 in Sleeve R10 mm R0.394 in	<b>FD-W44</b>					
	M4	190 7.480 90 3.543 Not equipped with FAST mode 32 1.260	23 0.906 11 0.433 8 0.315	14 0.551 7 0.276 4 0.157		R1 mm R0.039 in	<b>FD-WT8</b>				
	φ3 φ0.118	30 1.181 15 0.591 Not equipped with FAST mode 5 0.197	5 0.197 2.5 0.098 1.5 0.059	3 0.118 1.5 0.059 1 0.039	<b>FD-WS8</b>						
	M3	65 2.559 32 1.260 Not equipped with FAST mode 11 0.433	11 0.433 5 0.197 3 0.118	6 0.236 3 0.118 2 0.079	<b>FD-WG4</b>						
	High precision Small spot for sensing minute objects Coaxial · Lens mountable M4	65 2.559 32 1.260 Not equipped with FAST mode 11 0.433	11 0.433 5 0.197 3 0.118	6 0.236 3 0.118 2 0.079	φ0.02 mm φ0.0008 in gold wire	2 m 6.562 ft	R2 mm R0.079 in				<b>FD-WG4</b>
	For sensing minute objects Coaxial φ3 φ0.118	6.5 to 14 0.256 to 0.551 (Convergent point 8 0.315) 7 to 12 0.276 to 0.472 (Convergent point 8 0.315) Not equipped with FAST mode Cannot use	—	—							φ1.9 mm φ0.075 in metal pipe (gray)
	Fixed-focus reflective Glass substrate detection W24×H21×D4 (W0.945×H0.827×D0.157)	0.6 to 3.5 0.024 to 0.138 (Convergent point 2 0.079) 0.9 to 2.7 0.035 to 0.106 (Convergent point 2 0.079) Not equipped with FAST mode Cannot use	—	—	φ0.08 mm φ0.003 in gold wire	2 m 6.562 ft	R1 mm R0.039 in				
	Specular object detection W15×H19×D3 (W0.591×H0.749×D0.118)	15 0.591 7 0.276 Not equipped with FAST mode Cannot use	—	—							φ0.02 mm φ0.0008 in gold wire
	Side view φ2 φ0.079 φ3 φ0.118 Sleeve part cannot be bent.	220 8.661 100 3.937 Not equipped with FAST mode 35 1.378	40 1.575 20 0.787 13 0.512	20 0.787 10 0.394 7 0.276	φ0.02 mm φ0.0008 in gold wire	2 m 6.562 ft	R4 mm R0.157 in				
	Standard M6	90 3.543 45 1.772 Not equipped with FAST mode 16 0.630	20 0.787 10 0.394 6 0.236	10 0.394 5 0.197 3 0.118							<b>FD-P60</b>
	M4	36 1.417 18 0.709 Not equipped with FAST mode 6 0.236	5 0.197 2.5 0.098 1.5 0.059	3 0.118 1.5 0.059 1 0.039							<b>FD-P50</b>
	Small diameter M3	50 1.969 25 0.984 Not equipped with FAST mode 9 0.354	8 0.315 4 0.157 2.5 0.098	4 0.157 2 0.079 1.5 0.059							<b>FD-P40</b>
	φ1.5 φ0.059	—	—	—							1 m 3.281 ft

Notes: 1) The sensing range is specified for white non-glossy paper [100×100 mm 3.937×3.937 in (FD-WKZ1, FD-W8, FD-WT8, FD-WS8, and FD-P80: 400×400 mm 15.748×15.748 in, FD-WG4, FD-WSG4, FD-P60, and FD-P50: 200×200 mm 7.874×7.874 in, FD-WL41: glass substrate 100×100×t 2 mm 3.937×3.937×t 0.079 in)] as the object.

2) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.


3) The minimum sensing object size is the value for red LED type at maximum sensitivity. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.

Also, note that the corresponding setting distance is different from the rated sensing distance. However, with the fixed-focus reflective type, when the sensitivity is at MAX., it is only possible to detect the minimum size of the sensing object at a distance corresponding to the convergent point.

# FX-311

## LIST OF FIBERS

### Special use fibers [Reflective type]












Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1, 2)			Min. sensing object (at the maximum sensitivity (Note 3))	Fiber cable length ✂: Free-cut	Allowable bending radius	Model No.			
		Red LED	Blue LED	Green LED							
Wide beam	 W7 X H15 X D30 W0.276 X H0.591 X D1.181	200 7.874	25 0.984	—	φ0.02 mm φ0.0008 in gold wire	2 m 6.562 ft	R25 mm R0.984 in	FD-A15 <i>New</i>			
		150 5.906	15 0.591	—							
Array	 Top sensing W5 X H20 X D20 W0.197 X H0.787 X D0.787 Side sensing W5 X H20 X D20 W0.197 X H0.787 X D0.787	220 8.661	40 1.575	18 0.709	φ0.02 mm φ0.0008 in gold wire	2 m 6.562 ft	R25 mm R0.984 in	FD-AFM2			
		110 4.331	20 0.787	9 0.197				FD-AFM2E			
High precision	 M4 Coaxial · Lens mountable	110 4.331	22 0.866	12 0.472	φ0.02 mm φ0.0008 in gold wire	2 m 6.562 ft	R25 mm R0.984 in	FD-G4			
		55 2.165	11 0.433	6 0.236				FD-G6 <i>New</i>			
	 M3 Coaxial · Lens mountable	19 0.748	8 0.315	4 0.157				FD-EG1			
		38 1.496	6 0.236	3 0.118				FD-EG2 <i>New</i>			
	 M3 Coaxial · Lens mountable	18 0.709	3 0.118	1.5 0.059				φ0.04 mm φ0.0016 in gold wire	500 mm 19.685 in	R10 mm R0.394 in	FD-EG3 <i>New</i>
		12 0.472	2 0.079	1 0.039							FD-EG3 <i>New</i>
Ultra-small diameter	 φ0.5 φ0.020 φ1.5 φ0.059 Sleeve part cannot be bent.	11 0.433	2 0.079	1 0.039	φ0.02 mm φ0.0008 in gold wire	1 m 3.281 ft	R10 mm R0.394 in	FD-E12			
		6 0.236	1 0.039	—				FD-E22			
	 φ0.65 φ0.026 φ3 φ0.118 Sleeve part cannot be bent.	45 1.772	6 0.236	3 0.118				500 mm 19.685 in	R25 mm R0.984 in	FD-EN500S1	
		23 0.906	3 0.118	1.5 0.059						FD-ENM1S1	
	 M3 φ0.5 φ0.020 Sleeve part cannot be bent.	5 0.197	—	—				1 m 3.281 ft	R25 mm R0.984 in	FD-ENM1S1	
		3 0.118	—	—						FD-ENM1S1	
 M3 φ0.8 φ0.031 Sleeve part cannot be bent.	38 1.496	6 0.236	3 0.118	FD-ENM1S1							
	18 0.709	3 0.118	1.5 0.059	FD-ENM1S1							
Fixed-focus reflective	 Glass substrate detection SEMI S2 compliant W17 X H29 X D3.8 W0.669 X H1.142 X D0.150	0 to 20 0 to 0.787	—	—	(LCD glass)	2 m 6.562 ft	R4 mm R0.157 in	FD-L43			
		2.5 to 18 0.098 to 0.709 (Convergent point 8 0.315)	—	—	φ0.06 mm φ0.0024 in gold wire			FD-L41			
	3 to 16 0.118 to 0.630 (Convergent point 8 0.315)	—	—	φ0.03 mm φ0.0012 in gold wire	FD-L42						
	0.5 to 4 0.020 to 0.157 (Convergent point 2 0.079)	—	—	φ0.02 mm φ0.0008 in gold wire	FD-L4						
 W24 X H21 X D4 W0.984 X H0.827 X D0.157 Glass substrate detection Cannot use	1 to 3 0.039 to 0.150 (Convergent point 2 0.079)	—	—	FD-L4							
	1 to 3 0.039 to 0.150 (Convergent point 2 0.079)	—	—	FD-L4							
 W15 X H19 X D3 W0.591 X H0.748 X D0.118 Specular object detection Cannot use	2.5 to 18 0.098 to 0.709 (Convergent point 6 0.236)	4.5 to 9.5 0.177 to 0.374	5 to 9 0.197 to 0.354	FD-L4							
	4 to 12 0.157 to 0.472 (Convergent point 6 0.236)	5 to 9 0.197 to 0.354	5.5 to 8 0.217 to 0.315	FD-L4							
 W6 X H18 X D14 W0.236 X H0.709 X D0.551 Specular object detection Cannot use	4.8 to 9.5 0.189 to 0.374 (Convergent point 6 0.236)	—	—	FD-L4							
	4.8 to 9.5 0.189 to 0.374 (Convergent point 6 0.236)	—	—	FD-L4							
Liquid level sensing	 Contact type φ6 φ0.236	—	—	—	(Liquid)	2 m 6.562 ft	Protective tube R40 mm R1.575 in Fiber R15 mm R0.591 in	FD-F8Y			
		Applicable pipe diameter: Outer dia. φ6 to φ26 mm φ0.236 to φ1.024 in transparent pipe [PVC, fluorine resin, Polycarbonate, acrylic, glass, wall thickness 1 to 3 mm 0.039 to 0.118 in]	—	—	(Liquid)			FD-F41			
	 Mountable on pipe Standard W25 X H13 X D20 W0.984 X H0.512 X D0.787	Applicable pipe diameter: Outer dia. φ6 to φ26 mm φ0.236 to φ1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in]	—	—	FD-F91						
		Applicable pipe diameter: Outer dia. φ6 to φ26 mm φ0.236 to φ1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in]	—	—	FD-F4						
 Mountable on pipe for 1 mm 0.039 in thick PFA pipe W25 X H13 X D20 W0.984 X H0.512 X D0.787	Applicable pipe diameter: Outer dia. φ6 to φ26 mm φ0.236 to φ1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in]	—	—	FD-F9							
	Applicable pipe diameter: Outer dia. φ6 to φ26 mm φ0.236 to φ1.024 in transparent pipe [PFA (fluorine resin) or equivalently transparent pipe, wall thickness 1 mm 0.039 in]	—	—	FD-F9							
Tough flexible	 M6 Small spot for sensing minute objects M3 Coaxial · Lens mountable	185 7.283	32 1.260	16 0.630	φ0.02 mm φ0.0008 in gold wire	1 m 3.281 ft	R10 mm R0.394 in	FD-P81X <i>New</i>			
		80 3.150	16 0.630	8 0.315				FD-P81X <i>New</i>			
Tough flexible	 M3 Coaxial · Lens mountable	90 3.543	22 0.866	12 0.472	φ0.02 mm φ0.0008 in gold wire	1 m 3.281 ft	R10 mm R0.394 in	FD-G6X <i>New</i>			
		45 1.772	11 0.433	6 0.236				FD-G6X <i>New</i>			
Tough flexible	 M3 Coaxial · Lens mountable	20 0.787	6 0.236	4 0.157	φ0.02 mm φ0.0008 in gold wire	1 m 3.281 ft	R10 mm R0.394 in	FD-G6X <i>New</i>			
		20 0.787	6 0.236	4 0.157				FD-G6X <i>New</i>			

- Notes: 1) The sensing range is specified for white non-glossy paper [100 X 100 mm 3.937 X 3.937 in (FD-G4, FD-G6X and FD-A15: 200 X 200 mm 7.874 X 7.874 in, FD-AFM2, FD-AFM2E and FD-P81X: 400 X 400 mm 15.748 X 15.748 in, FD-L43: glass substrate 76 X 52 X t 1.1 mm 2.992 X 2.047 X t 0.043 in, FD-L41: glass substrate 100 X 100 X t 2 mm 3.937 X 3.937 X t 0.079 in)] as the object.
- 2) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.
- 3) The minimum sensing object size is the value for red LED type at maximum sensitivity. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type.
- Also, note that the corresponding setting distance is different from the rated sensing distance. However, with the fixed-focus reflective type, when the sensitivity is at MAX., it is only possible to detect the minimum size of the sensing object at a distance corresponding to the convergent point.
- 4) Following is the allowable cutting range from the end that the amplifier is inserted FD-F8Y: 1,000 mm 39.370 in, FD-G6X: 700 mm 27.559 in.

## LIST OF FIBERS

### Environment resistant fibers [Reflective type]

Type	Shape of fiber head (mm in)	Sensing range (mm in) (Note 1, 2)			Min. sensing object (at the maximum sensitivity (Note 3))	Fiber cable length (Free-cut)	Allowable bending radius	Model No.
		Red LED	Blue LED	Green LED				
Environment resistant	350 °C 662 °F · Coaxial 					2 m 6.562 ft	R25 mm R0.984 in	<b>FD-H35-M2</b>
	350 °C 662 °F Sleeve 60 mm 2.362 in M6 $\phi 2.8 \phi 0.110$ in 	270 10.630 140 5.512 Not equipped with FAST mode 47 1.850	36 1.417 18 0.709 12 0.472	20 0.787 10 0.394 7 0.276	$\phi 0.02$ mm $\phi 0.0008$ in gold wire	2 m 6.562 ft	R25 mm R0.984 in Fiber Sleeve R10 mm R0.394 in	<b>FD-H35-M2S6</b>
	200 °C 392 °F · Coaxial 					1 m 3.281 ft	R25 mm R0.984 in	<b>FD-H20-M1</b>
	350 °C 662 °F Sleeve 90 mm 3.543 in M4 $\phi 2.1 \phi 0.083$ in 	160 6.299 80 3.150 Not equipped with FAST mode 26 1.024	22 0.866 11 0.433 7 0.276	12 0.472 6 0.236 4 0.157	$\phi 0.02$ mm $\phi 0.0008$ in gold wire	1 m 3.281 ft	R25 mm R0.984 in Fiber Sleeve R10 mm R0.394 in	<b>FD-H35-20S</b> <i>New</i>
	200 °C 392 °F · Coaxial 	270 10.630 140 5.512 Not equipped with FAST mode 47 1.850	36 1.417 18 0.709 12 0.472	20 0.787 10 0.394 7 0.276	$\phi 0.02$ mm $\phi 0.0008$ in gold wire	1 m 3.281 ft	R25 mm R0.984 in	<b>FD-H20-21</b> <i>New</i>
	300 °C 572 °F · Glass substrate detection Fixed-focus reflective 	0 to 15 0 to 0.591 0 to 10 0 to 0.394 Not equipped with FAST mode 2 to 6 0.079 to 0.236	—	—	$\phi 0.02$ mm $\phi 0.0008$ in gold wire	2 m 6.562 ft	R25 mm R0.984 in	<b>FD-H30-L32</b> <i>New</i>
	180 °C 356 °F · Glass substrate detection Fixed-focus reflective 	—	—	—	—	2 m 6.562 ft	R25 mm R0.984 in	<b>FD-H18-L31</b> <i>New</i>
	130 °C 266 °F M6 	310 12.205 140 5.512 Not equipped with FAST mode 47 1.850	20 0.787 11 0.433 7 0.276	20 0.787 11 0.433 7 0.276	$\phi 0.02$ mm $\phi 0.0008$ in gold wire	2 m 6.562 ft	R25 mm R0.984 in	<b>FD-H13-FM2</b>
	Vacuum M6 	165 6.496 75 2.953 Not equipped with FAST mode 26 1.024	26 1.024 13 0.512 9 0.354	14 0.551 7 0.276 4 0.157	$\phi 0.02$ mm $\phi 0.0008$ in gold wire	1 m 3.281 ft	R200 mm R7.874 in	<b>FD-6V</b>

Notes: 1) The sensing range is specified for white non-glossy paper [400 × 400 mm 15.748 × 15.748 in (FD-H30-L32, FD-H18-L31: glass substrate 50 × 50 mm 1.969 × 1.969 in)] as the object.

2) Please take care that the sensing range of the free-cut type fiber may be reduced by 20 % max. depending upon how the fiber is cut.

3) The minimum sensing object size is the value for red LED type at maximum sensitivity. Please contact our office for information on the minimum sensing object size if using amplifiers other than red LED type. Also, note that the corresponding setting distance is different from the rated sensing distance.

### The vacuum type fiber must be used with the following products as a set.

FT-J6: Fiber at atmospheric side (one pair set)

FV-BR1: Photo-terminal (one pair set)

### Semi-standard fibers (Custom made per order)


The fiber cable length or sleeve length of the standard fibers can be modified at your request. Select the fiber cable length (symbol  $\boxtimes$ ) or the sleeve length (symbol  $\boxtriangle$ ) from the table below.

Type	Basic model No.	$\boxtimes$ Fiber cable length (Unit: m ft)	$\boxtriangle$ Sleeve length (Unit: cm in)
Standard threaded head (free-cut)	<b>FD-FM</b> $\boxtimes$	3 9.843, 4 13.123, 5 16.404, 10 32.808, 15 49.213, 20 65.617	—
With sleeve	<b>FD-FM</b> $\boxtimes$ -S $\boxtriangle$	2 6.562 (Note), 3 9.843, 4 13.123, 5 16.404, 10 32.808, 15 49.213, 20 65.617	1 0.394, 2 0.787, 3 1.181, 4 1.575, 5 1.969, 6 2.362, 7 2.756, 8 3.15, 9 3.543, 10 3.937, 11 4.331, 12 4.724
Small diameter threaded head with sleeve (free-cut)	<b>FD-NFM2-S</b> $\boxtriangle$	—	1 0.394, 2 0.787, 3 1.181, 4 1.575, 5 1.969, 6 2.362, 7 2.756, 8 3.15, 9 3.543, 10 3.937, 11 4.331, 12 4.724
200°C 392°F heat-resistant	<b>FD-H20-M</b> $\boxtimes$	2 6.562, 3 9.843	—
350°C 662°F heat-resistant	<b>FD-H35-M</b> $\boxtimes$	3 9.843	—

Note: The standard fiber has a 2 m 6.562 ft fiber cable length and a 4 cm 1.575 in or 9 cm 3.543 in sleeve length.


### Correlation between sensing range attenuation coefficient and fiber cable length

The longer the fiber cable, the shorter the sensing range.




### Accessories (attached with fibers)

#### Fiber cutter




• FX-CT2




#### Fiber attachment



• FX-AT2



• FX-AT3



• FX-AT4







Notes: 1) Fiber cutter is not supplied as accessory along with FT-NB8, FT-N8, FD-N8 and FD-N4. Please order it separately.

2) The fiber attachment is not attached with FT-N8/NB8, FT/FD-P80 and FD-N8. The previous FX-AT10 attachment is included with FD-N4.

# FX-311






## FIBER OPTIONS

### Lens (For thru-beam type fiber)

Designation	Model No.	Description																																																																																															
For thru-beam type fiber	Expansion lens (Note 1) <b>FX-LE1</b>		Increases the sensing range by 5 times or more. • Ambient temperature: - 60 to + 350 °C - 76 to + 662 °F																																																																																														
			<table border="1"> <thead> <tr> <th colspan="4">Sensing range (mm in) [Lens on both sides] (Note 2)</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>LONG</th> <th>STD</th> <th>S-D</th> </tr> </thead> <tbody> <tr><td>FT-B8</td><td>3,500</td><td>137.759 (Note 3)</td><td>2,500</td><td>98.425</td><td>1,000</td><td>39.370</td></tr> <tr><td>FT-FM2</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>1,300</td><td>51.181</td></tr> <tr><td>FT-T80</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>1,300</td><td>51.181</td></tr> <tr><td>FT-R80</td><td>3,500</td><td>137.759 (Note 3)</td><td>2,300</td><td>90.551</td><td>800</td><td>31.496</td></tr> <tr><td>FT-W8</td><td>3,500</td><td>137.759 (Note 3)</td><td>2,900</td><td>114.173</td><td>1,000</td><td>39.370</td></tr> <tr><td>FT-P80</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>1,100</td><td>43.307</td></tr> <tr><td>FT-P60</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>900</td><td>35.433</td></tr> <tr><td>FT-P81X</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>1,100</td><td>43.307</td></tr> <tr><td>FT-H35-M2</td><td>3,500</td><td>137.759 (Note 3)</td><td>2,000</td><td>78.740</td><td>750</td><td>29.528</td></tr> <tr><td>FT-H20W-M1</td><td>1,600</td><td>62.992 (Note 3)</td><td>1,300</td><td>51.181</td><td>500</td><td>19.685</td></tr> <tr><td>FT-H20W-M2</td><td>2,600</td><td>102.362</td><td>1,300</td><td>51.181</td><td>500</td><td>19.685</td></tr> <tr><td>FT-H20-M1</td><td>1,600</td><td>62.992 (Note 3)</td><td>1,600</td><td>62.992 (Note 3)</td><td>900</td><td>35.433</td></tr> </tbody> </table>		Sensing range (mm in) [Lens on both sides] (Note 2)				Fiber	Mode	LONG	STD	S-D	FT-B8	3,500	137.759 (Note 3)	2,500	98.425	1,000	39.370	FT-FM2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,300	51.181	FT-T80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,300	51.181	FT-R80	3,500	137.759 (Note 3)	2,300	90.551	800	31.496	FT-W8	3,500	137.759 (Note 3)	2,900	114.173	1,000	39.370	FT-P80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,100	43.307	FT-P60	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	900	35.433	FT-P81X	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,100	43.307	FT-H35-M2	3,500	137.759 (Note 3)	2,000	78.740	750	29.528	FT-H20W-M1	1,600	62.992 (Note 3)	1,300	51.181	500	19.685	FT-H20W-M2	2,600	102.362	1,300	51.181	500	19.685	FT-H20-M1	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	900	35.433
			Sensing range (mm in) [Lens on both sides] (Note 2)																																																																																														
			Fiber	Mode	LONG	STD	S-D																																																																																										
FT-B8	3,500	137.759 (Note 3)	2,500	98.425	1,000	39.370																																																																																											
FT-FM2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,300	51.181																																																																																											
FT-T80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,300	51.181																																																																																											
FT-R80	3,500	137.759 (Note 3)	2,300	90.551	800	31.496																																																																																											
FT-W8	3,500	137.759 (Note 3)	2,900	114.173	1,000	39.370																																																																																											
FT-P80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,100	43.307																																																																																											
FT-P60	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	900	35.433																																																																																											
FT-P81X	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,100	43.307																																																																																											
FT-H35-M2	3,500	137.759 (Note 3)	2,000	78.740	750	29.528																																																																																											
FT-H20W-M1	1,600	62.992 (Note 3)	1,300	51.181	500	19.685																																																																																											
FT-H20W-M2	2,600	102.362	1,300	51.181	500	19.685																																																																																											
FT-H20-M1	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	900	35.433																																																																																											
Super-expansion lens (Note 1) <b>FX-LE2</b>		Tremendously increases the sensing range with large diameter lenses. • Ambient temperature: - 60 to + 350 °C - 76 to + 662 °F	<table border="1"> <thead> <tr> <th colspan="4">Sensing range (mm in) [Lens on both sides] (Note 2)</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>LONG</th> <th>STD</th> <th>S-D</th> </tr> </thead> <tbody> <tr><td>FT-B8</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-FM2</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-R80</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-W8</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-P80</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-P60</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-P81X</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-H35-M2</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> <tr><td>FT-H20W-M1</td><td>1,600</td><td>62.992 (Note 3)</td><td>1,600</td><td>62.992 (Note 3)</td><td>1,500</td><td>59.055</td></tr> <tr><td>FT-H20W-M2</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>1,500</td><td>59.055</td></tr> <tr><td>FT-H20-M1</td><td>1,600</td><td>62.992 (Note 3)</td><td>1,600</td><td>62.992 (Note 3)</td><td>1,600</td><td>62.992 (Note 3)</td></tr> <tr><td>FT-H13-FM2</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td><td>3,500</td><td>137.759 (Note 3)</td></tr> </tbody> </table>	Sensing range (mm in) [Lens on both sides] (Note 2)				Fiber	Mode	LONG	STD	S-D	FT-B8	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-FM2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-R80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-W8	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-P80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-P60	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-P81X	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-H35-M2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	FT-H20W-M1	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	1,500	59.055	FT-H20W-M2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,500	59.055	FT-H20-M1	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	FT-H13-FM2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	
		Sensing range (mm in) [Lens on both sides] (Note 2)																																																																																															
		Fiber	Mode	LONG	STD	S-D																																																																																											
		FT-B8	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																									
FT-FM2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-R80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-W8	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-P80	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-P60	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-P81X	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-H35-M2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
FT-H20W-M1	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	1,500	59.055																																																																																											
FT-H20W-M2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	1,500	59.055																																																																																											
FT-H20-M1	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)	1,600	62.992 (Note 3)																																																																																											
FT-H13-FM2	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)	3,500	137.759 (Note 3)																																																																																											
Side-view lens <b>FX-SV1</b>		Beam axis is bent by 90 °. • Ambient temperature: - 60 to + 300 °C - 76 to + 572 °F	<table border="1"> <thead> <tr> <th colspan="4">Sensing range (mm in) [Lens on both sides] (Note 2)</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>LONG</th> <th>STD</th> <th>S-D</th> </tr> </thead> <tbody> <tr><td>FT-B8</td><td>1,100</td><td>43.307</td><td>530</td><td>20.866</td><td>186</td><td>7.323</td></tr> <tr><td>FT-FM2</td><td>1,200</td><td>47.244</td><td>600</td><td>23.622</td><td>210</td><td>8.268</td></tr> <tr><td>FT-T80</td><td>1,200</td><td>47.244</td><td>600</td><td>23.622</td><td>210</td><td>8.268</td></tr> <tr><td>FT-W8</td><td>900</td><td>35.433</td><td>450</td><td>17.717</td><td>160</td><td>6.299</td></tr> <tr><td>FT-P80</td><td>1,200</td><td>47.244</td><td>600</td><td>23.622</td><td>210</td><td>8.268</td></tr> <tr><td>FT-P60</td><td>650</td><td>25.591</td><td>300</td><td>11.811</td><td>130</td><td>5.118</td></tr> <tr><td>FT-P81X</td><td>1,200</td><td>47.244</td><td>600</td><td>23.622</td><td>200</td><td>7.874</td></tr> <tr><td>FT-H35-M2</td><td>550</td><td>21.654</td><td>280</td><td>11.024</td><td>90</td><td>3.543</td></tr> <tr><td>FT-H20W-M1</td><td>310</td><td>12.205</td><td>140</td><td>5.512</td><td>50</td><td>1.969</td></tr> <tr><td>FT-H20W-M2</td><td>310</td><td>2.205</td><td>140</td><td>5.512</td><td>50</td><td>1.969</td></tr> <tr><td>FT-H20-M1</td><td>550</td><td>21.654</td><td>280</td><td>11.024</td><td>90</td><td>3.543</td></tr> </tbody> </table>	Sensing range (mm in) [Lens on both sides] (Note 2)				Fiber	Mode	LONG	STD	S-D	FT-B8	1,100	43.307	530	20.866	186	7.323	FT-FM2	1,200	47.244	600	23.622	210	8.268	FT-T80	1,200	47.244	600	23.622	210	8.268	FT-W8	900	35.433	450	17.717	160	6.299	FT-P80	1,200	47.244	600	23.622	210	8.268	FT-P60	650	25.591	300	11.811	130	5.118	FT-P81X	1,200	47.244	600	23.622	200	7.874	FT-H35-M2	550	21.654	280	11.024	90	3.543	FT-H20W-M1	310	12.205	140	5.512	50	1.969	FT-H20W-M2	310	2.205	140	5.512	50	1.969	FT-H20-M1	550	21.654	280	11.024	90	3.543								
		Sensing range (mm in) [Lens on both sides] (Note 2)																																																																																															
		Fiber	Mode	LONG	STD	S-D																																																																																											
		FT-B8	1,100	43.307	530	20.866	186	7.323																																																																																									
FT-FM2	1,200	47.244	600	23.622	210	8.268																																																																																											
FT-T80	1,200	47.244	600	23.622	210	8.268																																																																																											
FT-W8	900	35.433	450	17.717	160	6.299																																																																																											
FT-P80	1,200	47.244	600	23.622	210	8.268																																																																																											
FT-P60	650	25.591	300	11.811	130	5.118																																																																																											
FT-P81X	1,200	47.244	600	23.622	200	7.874																																																																																											
FT-H35-M2	550	21.654	280	11.024	90	3.543																																																																																											
FT-H20W-M1	310	12.205	140	5.512	50	1.969																																																																																											
FT-H20W-M2	310	2.205	140	5.512	50	1.969																																																																																											
FT-H20-M1	550	21.654	280	11.024	90	3.543																																																																																											
Expansion lens for vacuum fiber (Note 1) <b>FV-LE1</b>		Sensing range increases by 15 times or more. • Ambient temperature: - 40 to + 120 °C - 40 to + 248 °F	<table border="1"> <thead> <tr> <th colspan="4">Sensing range (mm in) [Lens on both sides] (Note 2)</th> </tr> <tr> <th>Fiber</th> <th>Mode</th> <th>LONG</th> <th>STD</th> <th>S-D</th> </tr> </thead> <tbody> <tr><td>FT-6V</td><td>3,500</td><td>137.759 (Note 3)</td><td>2,700</td><td>106.299</td><td>940</td><td>37.008</td></tr> <tr><td>FT-60V</td><td>2,800</td><td>110.236</td><td>1,450</td><td>57.087</td><td>490</td><td>19.291</td></tr> </tbody> </table>	Sensing range (mm in) [Lens on both sides] (Note 2)				Fiber	Mode	LONG	STD	S-D	FT-6V	3,500	137.759 (Note 3)	2,700	106.299	940	37.008	FT-60V	2,800	110.236	1,450	57.087	490	19.291																																																																							
Sensing range (mm in) [Lens on both sides] (Note 2)																																																																																																	
Fiber	Mode	LONG	STD	S-D																																																																																													
FT-6V	3,500	137.759 (Note 3)	2,700	106.299	940	37.008																																																																																											
FT-60V	2,800	110.236	1,450	57.087	490	19.291																																																																																											

Notes: 1) Be careful when installing the thru-beam type fiber equipped with the expansion lens, as the beam envelope becomes narrow and alignment is difficult. Especially when installing a fiber with many cores (sharp bending fibers and heat-resistant glass fiber) please be sure to use it only after you have adjusted it sufficiently.  
2) The sensing ranges are the values for red LED type amplifier. Please contact our office for details on sensing ranges for other types of amplifiers.  
3) The fiber cable length practically limits the sensing range to 3,500 mm 137.795 in long (FT-H20W-M1 and FT-H20-M1: 1,600 mm 62.992 in).

### Lens (For reflective type fiber)

Designation	Model No.	Description	
For reflective type fiber	Pinpoint spot lens <b>FX-MR1</b>		Pinpoint spot of $\phi 0.5$ mm $\phi 0.020$ in. Enables detection of minute objects or small marks. • Distance to focal point: $6 \pm 1$ mm $0.236 \pm 0.039$ in • Applicable fibers: <b>FD-WG4, FD-G4</b> • Ambient temperature: - 40 to + 70 °C - 40 to + 158 °F
	Zoom lens <b>FX-MR2</b>		The spot diameter is adjustable from $\phi 0.7$ to $\phi 2$ mm $\phi 0.028$ to $0.079$ in according to how much the fiber is screwed in. • Applicable fibers: <b>FD-WG4, FD-G4</b> • Ambient temperature: - 40 to + 70 °C - 40 to + 158 °F • Accessory: <b>MS-EX-3</b> (Mounting bracket)
	Finest spot lens <b>FX-MR3</b>		Extremely fine spot of $\phi 0.3$ mm $\phi 0.012$ in approx. achieved. • Applicable fibers: <b>FD-WG4, FD-G4, FD-EG1, FD-EG2, FD-EG3, FD-G6X, FD-G6</b> • Ambient temperature: - 40 to + 70 °C - 40 to + 158 °F
	Finest spot lens <b>FX-MR6</b>		Extremely fine spot of $\phi 0.1$ mm $\phi 0.040$ in approx. achieved. • Applicable fibers: <b>FD-WG4, FD-G4, FD-EG1, FD-EG2, FD-EG3, FD-G6X, FD-G6</b> • Ambient temperature: - 20 to + 60 °C - 4 to + 140 °F
	Zoom lens (Side-view type) <b>FX-MR5</b>		<b>FX-MR2</b> is converted into a side-view type and can be mounted in a very small space. • Applicable fibers: <b>FD-WG4, FD-G4</b> • Ambient temperature: - 40 to + 70 °C - 40 to + 158 °F

Note: The sensing ranges are the values when used in combination with red LED type amplifier. Please contact our office for details on sensing distances for other types of amplifier.

## FIBER OPTIONS


### Others

Designation	Model No.	Description			
Protective tube (For thru-beam type fiber)	FTP-500 (0.5 m 1.640 ft)	For M4 thread	FT-B8 FT-NB8 FT-FM2 FT-FM2S4	FT-N8 FT-P80 FT-P60 FT-H13-FM2	
	FTP-1000 (1 m 3.281 ft)		Applicable fibers	FT-T80 FT-NFM2 FT-NFM2S FT-NFM2S4	FT-P40 FD-T40 FD-P40
	FTP-1500 (1.5 m 4.921 ft)			The protective tube, made of non-corrosive stainless steel, protects the inner fiber cable from any external forces.	FD-B8 FD-FM2 FD-FM2S4 FD-N8
	FTP-N500 (0.5 m 1.640 ft)	For M3 thread			FD-T80 FD-N4 FD-NFM2 FD-NFM2S FD-NFM2S4
	FTP-N1000 (1 m 3.281 ft)				
	FTP-N1500 (1.5 m 4.921 ft)	For M4 thread			
Protective tube (For reflective type fiber)	FDP-500 (0.5 m 1.640 ft)	For M6 thread	FD-B8 FD-FM2 FD-FM2S4 FD-N8	FD-P80 FD-H13-FM2	
	FDP-1000 (1 m 3.281 ft)		Applicable fibers	FD-T80 FD-N4 FD-NFM2 FD-NFM2S FD-NFM2S4	
	FDP-1500 (1.5 m 4.921 ft)			For M3 thread	FD-T80 FD-N4 FD-NFM2 FD-NFM2S FD-NFM2S4
	FDP-N500 (0.5 m 1.640 ft)	For M4 thread			
	FDP-N1000 (1 m 3.281 ft)				
	FDP-N1500 (1.5 m 4.921 ft)				
Fiber bender	FB-1	The fiber bender bends the sleeve part of the fiber head at the proper radius. (Note 1)			
Universal sensor mounting stand	MS-AJ1-F	Horizontal mounting type	Fiber assemblies (For M3, M4 or M6 threaded head fiber)		
	MS-AJ2-F	Vertical mounting type			
Fiber cutter	FX-CT1	The free-cut type fiber can be easily cut. (Note 3)			
	FX-CT2	The free-cut type fiber can be easily cut. (Accessory for the free-cut type fiber. Not attached with the FT-N8/NB8 and FD-N8/N4)			
Fixed-length fiber attachment	FX-AT2	Fixed-length fiber attachment (Attached with fiber)			
$\phi 2.2$ mm $\phi 0.087$ in fiber attachment	FX-AT3	$\phi 2.2$ mm $\phi 0.087$ in fiber attachment (Accessory for the fiber. Not attached with the FT-N8/NB8/P80 and FD-N8/P80)			
$\phi 1$ mm $\phi 0.039$ in fiber attachment	FX-AT4	$\phi 1$ mm $\phi 0.039$ in fiber attachment (Accessory for the fiber. Not attached with the FD-N4) (Note 2)			
$\phi 1.3$ mm $\phi 0.051$ in fiber attachment	FX-AT5	$\phi 1.3$ mm $\phi 0.051$ in fiber attachment (Accessory for the fiber)			
$\phi 1$ mm $\phi 0.039$ in and $\phi 1.3$ mm $\phi 0.051$ in mixed fiber attachment	FX-AT6	$\phi 1$ mm $\phi 0.039$ in and $\phi 1.3$ mm $\phi 0.051$ in mixed fiber attachment (Accessory for the fiber)			

Notes: 1) The end sleeve of the side-view and ultra-small diameter head fibers cannot be bent.  
 2) The conventional FX-AT10 fiber attachment is attached with the FD-N4.  
 3) The conventional FX-CT1 fiber cutter is attached with the FT-P80 and FD-P80.


### Protective tube

- FTP-□
- FDP-□



### Fiber bender


- FB-1




### Universal sensor mounting stand

Using the arm which enables adjustment in the horizontal direction, sensing can also be done from above an assembly line.

- MS-AJ1-F




- MS-AJ2-F




### Fiber cutter

- FX-CT1



- FX-CT2




### Fiber attachment


Now it's possible to simultaneously cut two fibers to the same length. Each fiber (with some exceptions) has a newly developed two-in-one fiber attachment (FX-AT3/AT4/AT5/AT6) which enables two fibers to be cut simultaneously to the same length with the new fiber cutter (FX-CT2). Also, since the fibers can be attached to the amplifier while being fixed in position in the two-in-one fiber attachment, sensitivity changes resulting from variation in the amount of fiber insertion do not occur.




FX-AT2



FX-AT3



FX-AT4/AT5/AT6



# FX-311

## SPECIFICATIONS

### Amplifiers


Item	Type Model No.	NPN output			PNP output		
		Red LED	Blue LED	Green LED	Red LED	Blue LED	Green LED
		<b>FX-311</b>	<b>FX-311B</b>	<b>FX-311G</b>	<b>FX-311P</b>	<b>FX-311BP</b>	<b>FX-311GP</b>
Supply voltage		12 to 24 V DC $\pm$ 10 % Ripple P-P 10 % or less					
Power consumption		840 mW or less (Current consumption 35 mA or less at 24 V supply voltage)					
Output		NPN open-collector transistor • Maximum sink current: 100 mA (50 mA, if five, or more, amplifiers are connected in cascade) • Applied voltage: 30 V DC or less (between output and 0 V) • Residual voltage: 1.5 V or less (at 100 mA sink current (50 mA, if five, or more, amplifiers are connected in cascade))			PNP open-collector transistor • Maximum source current: 100 mA (50 mA, if five, or more, amplifiers are connected in cascade) • Applied voltage: 30 V DC or less (between output and + V) • Residual voltage: 1.5 V or less (at 100 mA source current (50 mA, if five, or more, amplifiers are connected in cascade))		
	Utilization category	DC-12 or DC-13					
	Output operation	Selectable either Light-ON or Dark-ON, with selection switch					
	Short-circuit protection	Incorporated					
Response time		<Red LED type> 250 $\mu$ s or less (STD / S-D), 2 ms or less (LONG) selectable with selection switch			<Blue LED type / Green LED type> 150 $\mu$ s or less (FAST), 250 $\mu$ s or less (STD), 2 ms or less (LONG) selectable with selection switch		
Operation indicator		Orange LED (lights up when the output is ON)					
Stability indicator		Green LED (lights up under stable light received condition or stable dark condition)					
Sensitivity adjuster		12-turn potentiometer with indicator (Pointer part: red backlight) (Note 1)					
Timer function		Incorporated with OFF-delay timer, selectable either effective (approx. 10 ms or 40 ms) or ineffective					
Automatic interference prevention function		Incorporated (Up to 4 sets of fiber heads can be mounted close together.) (Note 2)					
Environmental resistance	Pollution degree	3 (Industrial environment)					
	Ambient temperature	- 10 to + 55 °C - 14 to + 131 °F (If 4 to 7 units are connected in cascade: - 10 to + 50 °C + 14 to + 122 °F, if 8 to 16 units are connected in cascade: - 10 to + 45 °C + 14 to + 113 °F) (No dew condensation or icing allowed), Storage: - 20 to + 70 °C - 4 to + 158 °F					
	Ambient humidity	35 to 85 % RH, Storage: 35 to 85 % RH					
	Ambient illuminance	Sunlight: 10,000 lx at the light-receiving face, Incandescent light: 3,000 lx at the light-receiving face					
	EMC	EN 50081-2, EN 50082-2, EN 60947-5-2					
	Voltage withstandability	1,000 V AC for one min. between all supply terminals connected together and enclosure (Note 3)					
	Insulation resistance	20 M $\Omega$ , or more, with 250 V DC megger between all supply terminals connected together and enclosure (Note 3)					
	Vibration resistance	10 to 150 Hz frequency, 0.75 mm 0.03 in amplitude in X, Y and Z directions for two hours each					
Shock resistance	98 m/s <sup>2</sup> acceleration (10 G approx.) in X, Y and Z directions for five times each						
Emitting element (modulated)		Red LED	Blue LED	Green LED	Red LED	Blue LED	Green LED
Material		Enclosure: Heat-resistant ABS, Case cover: Polycarbonate					
Connecting method		Connector (Note 4)					
Cable extension		Extension up to total 100 m 328.084 ft is possible with 0.3 mm <sup>2</sup> , or more, cable					
Weight		15 g approx.					

- Notes: 1) The red backlight of the pointer part lights up more brightly when the power is turned ON and when the sensitivity is adjusted.  
 2) When the power supply is switched on, the emission timing are automatically set for interference prevention.  
 3) The voltage withstandability and the insulation resistance values given in the above table are for the amplifier only.  
 4) The cable for amplifier connection is not supplied as an accessory. Make sure to use the optional quick-connection cable given below.  
 Main cable (3-core): **CN-73-C1** (cable length 1 m 3.281 ft), **CN-73-C2** (cable length 2 m 6.562 ft), **CN-73-C5** (cable length 5 m 16.404 ft)  
 Sub cable (1-core): **CN-71-C1** (cable length 1 m 3.281 ft), **CN-71-C2** (cable length 2 m 6.562 ft), **CN-71-C5** (cable length 5 m 16.404 ft)

## I/O CIRCUIT AND WIRING DIAGRAMS

### NPN output type


#### I/O circuit diagram

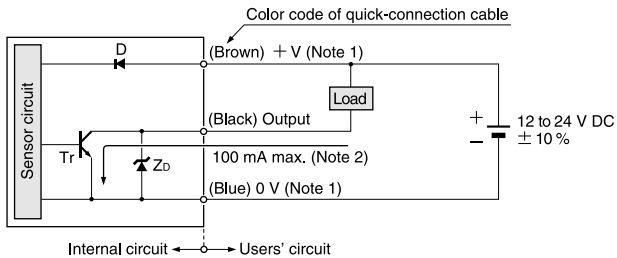

Notes: 1) The quick-connection sub cable does not have + V (brown) and 0 V (blue).  
 2) 50 mA max., if five amplifiers, or more, are connected together.


Symbols ... D : Reverse supply polarity protection diode  
 Zd: Surge absorption zener diode  
 Tr : NPN output transistor

#### Wiring diagram

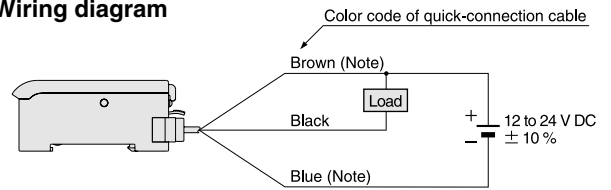


Note: The quick-connection sub cable does not have brown lead wire and blue cable.

#### Terminal arrangement diagram



### PNP output type


#### I/O circuit diagram

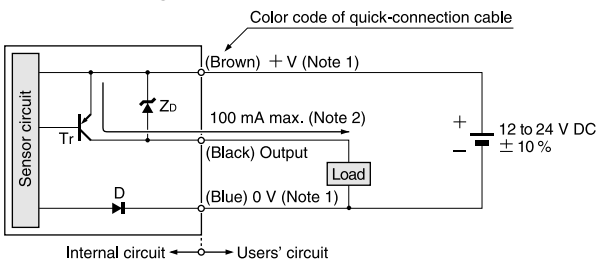

Notes: 1) The quick-connection sub cable does not have + V (brown) and 0 V (blue).  
 2) 50 mA max., if five amplifiers, or more, are connected together.


Symbols ... D : Reverse supply polarity protection diode  
 Zd: Surge absorption zener diode  
 Tr : PNP output transistor

#### Wiring diagram

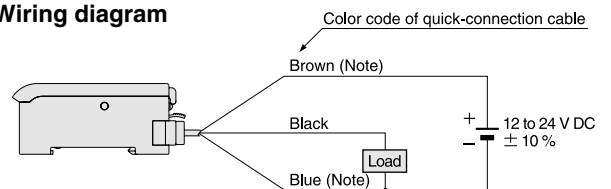

Note: The quick-connection sub cable does not have brown lead wire and blue lead wire.

#### Terminal arrangement diagram





# FX-311

## PRECAUTIONS FOR PROPER USE

### Amplifier




This product is not a safety sensor. Its use is not intended or designed to protect life and prevent body injury or property damage from dangerous parts of machinery. It is a normal object detection sensor.

### Mounting


#### How to mount the amplifier

- Fit the rear part of the mounting section of the amplifier on a 35 mm 1.378 in width DIN rail.
- Press down the front part of the mounting section of the amplifier on the 35 mm 1.378 in width DIN rail.



#### How to remove the amplifier


- Push the amplifier forward.
- Lift up the front part of the amplifier to remove it.



Note: Take care that if the front part is lifted up without pushing the amplifier forward, the hook on the rear portion of the mounting section is likely to break.

#### How to connect the fiber cables

- Snap the fiber lock lever down.
- Insert the fiber cables slowly into the inlets until they stop. (Note 1)
- Return the fiber lock lever to the original position, till it stops.




Notes: 1) In case the fiber cables are not inserted to a position where they stop, the sensing range reduces.  
2) With the coaxial reflective type fiber, such as **FD-G4** or **FD-FM2**, insert the single-core fiber cable into the beam-emitting inlet and the multi-core fiber cable into the beam-receiving inlet. If they are inserted in reverse, the sensing accuracy will deteriorate.

### Connection

- Make sure that the power supply is off while connecting or disconnecting the quick-connection cable.

#### Connection method


- Holding the connector of the quick-connection cable, align its projection with the groove at the top portion of the amplifier connector.
- Insert the connector till a click is felt.




#### Disconnection method

- Pressing the projection at the top of the quick-connection cable connector, pull out the connector.

Note: Take care that if the connector is pulled out without pressing the projection, the projection may break. Do not use a quick-connection cable whose projection has broken.  
Further, do not pull by holding the cable, as this can cause a cable-break.



### Part description

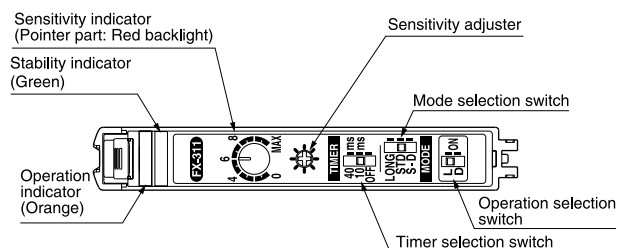


### Cascading amplifiers

- Make sure that the power supply is off while cascading or removing the amplifiers.
- Make sure to check the allowable ambient temperature, as it depends on the number of amplifiers connected in cascade.
- In case two, or more, amplifiers are connected in cascade, make sure to mount them on a DIN rail.
- When connecting in cascade, mount the amplifiers close to each other, fitting them between the optional end plates (**MS-DIN-E**) mounted at the two ends.
- When the amplifiers move on the DIN rail depending on the attaching condition, fitting them between the optional end plates (**MS-DIN-E**) mounted at the two ends.
- Up to maximum 15 amplifiers can be added (total 16 amplifiers connected in cascade.)
- When connecting more than two amplifiers in cascade, use the sub cable (**CN-71-C□**) as the quick-connection cable for the second amplifier onwards.


#### Cascading method

- Mount the amplifiers, one by one, on the 35 mm 1.378 in width DIN rail. (For details, refer to 'Mounting'.)
- Slide the sub units next to the main unit, and connect the quick-connection cables.
- Mount the optional end plates (**MS-DIN-E**) at both the ends to hold the amplifiers between their flat sides.
- Tighten the screws to fix the end plates (**MS-DIN-E**).

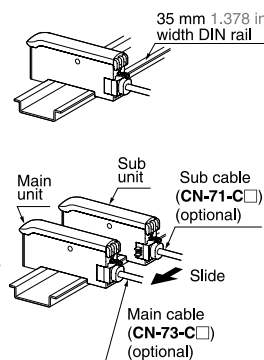

#### Dismantling

- Loosen the screws of the end plates (**MS-DIN-E**).
- Remove the end plates (**MS-DIN-E**).
- Slide the sub units and remove them one by one. (For details, refer to 'Mounting'.)



### Operation method

- The most suitable sensing mode can be selected according to the application from LONG (long-range), STD (standard), FAST (high-speed) or S-D (reduced intensity).

Mode selection switch		Application	Response time
Red LED type	Blue LED type / Green LED type		
LONG STD S-D	LONG STD FAST	Used in case long distance sensing is required. (However, the response time is longer than in STD mode.)	2 ms
LONG STD S-D	LONG STD FAST	Used for general sensing application.	250 μs
—	LONG STD FAST	Used in case high-speed sensing is required.	150 μs
LONG STD S-D	—	Since the emitted light amount is restricted in this mode, it is suitable for delicate sensing, such as when the received light is saturated due to too short a sensing distance or when detecting translucent objects, etc.	250 μs

Note: Make sure to carry out sensitivity adjustment after mode setting.

## PRECAUTIONS FOR PROPER USE

### Amplifiers

#### Sensitivity adjustment

☉ : Lights up ● : Lights off


• Adjust the sensitivity, observing the operation indicator (orange). However, since the condition for lighting up of the indicator depends on the combination of the sensing condition and selected operation for L/D-ON, verify it from the table on the right.

Sensing condition	Operation	Operation indicator
Light	L-ON (Light-ON)	☉
	D-ON (Dark-ON)	●
Dark	L-ON (Light-ON)	●
	D-ON (Dark-ON)	☉

- The sensitivity adjuster is a 12-turn potentiometer. The maximum sensitivity is obtained by turning it fully clockwise.
- The pointer shows the present sensitivity level.

#### Assist function

• This product incorporates an 'assist function', which helps to easily search the optimum sensitivity position by blinking of the pointer. In order to make 'assist function' effective, switch the operation selection switch in the order L-ON (Light-ON) → D-ON (Dark-ON) → L-ON (Light-ON).




- Notes: 1) 'Assist function' cannot be used when adjusting sensitivity for moving objects.  
 2) 'Assist function' turns off automatically once the sensitivity adjustment has been completed.  
 3) In case 'assist function' is not to be used, set the operation selection switch to D-ON (Dark-ON) and wait for 2 sec., or more, to make 'assist function' ineffective.

Step	Sensing method		Operation	Sensitivity indicator
	Reflective type	Thru-beam type		
①	★ Make sure that the operation mode switch is set to L-ON (Light-ON). In case 'assist function' is to be used, switch the operation mode switch in the order of L-ON (Light-ON) → D-ON (Dark-ON) → L-ON (Light-ON).		Turn the sensitivity adjuster fully counterclockwise. (Minimum sensitivity)	
②			In the beam received condition, slowly turn the adjuster clockwise and find the point (A) where the sensor is switched ON. The pointer blinks once at the point (A). (Note 1)	
③			In the beam not received condition, slowly turn the adjuster further clockwise until the sensor goes into the ON state again. Once it is switched on, turn the adjuster counterclockwise a little and find the point (B) where it is switched OFF. The pointer blinks twice at the point (B). (Note 2) (If the sensor does not go into the ON state, MAX is the point (B).)	
④			Turn the adjuster towards the point (A) from the point (B) slowly. The pointer starts blinking when it approaches (A) the optimum sensitivity point and blinks faster at the optimum sensitivity point for 3 sec. This point is the optimum sensitivity point. (Note 2)	
⑤	Select either L-ON (Light-ON) or D-ON (Dark-ON) according to your application.			

- Notes: 1) When 'assist function' is not used, the pointer does not blink.  
 2) When 'assist function' is not used, the middle point of (A) and (B) is regarded as the optimum sensitivity position.  
 3) In order to protect the mechanism, the sensitivity adjuster idles when over turned, which may result in a backlash of 1 to 2 divisions.  
 4) Depending upon the sensing conditions, stable sensing may be possible at a position which is slightly shifted from the optimum sensitivity position.  
 5) Do not move or bend the fiber cable after the sensitivity adjustment. Detection may become unstable.

#### Timer function

• This product incorporates OFF-delay timer function. The timer period can be selected as either 10 ms approx. or 40 ms approx. with the timer selection switch. Since the output is extended by a fixed period, it is useful when the connected device has a slow response time or when small objects are being sensed and the output signal width is small.

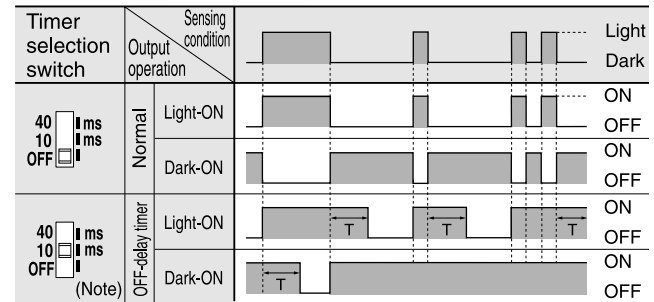

Timer period T: 10 ms approx. (when set to 10 ms)  
 40 ms approx. (when set to 40 ms)

Note: The diagram shows the case when 10 ms time period is selected.

#### Interference prevention function

• This product incorporates an automatic interference prevention function. If the amplifiers are mounted in cascade, since a different emission timing is automatically set for up to 4 amplifiers, up to 4 sets of fiber heads can be mounted close together. Further, even if the amplifiers are mounted close together along with digital fiber sensor FX-301 series, FX-302(P), the interference prevention function works. However, in case both models of amplifiers are mounted in cascade, mount identical models together.

#### Wiring

- Make sure that the power supply is off while wiring and cascading work.
- Verify that the supply voltage variation is within the rating.
- Take care that if a voltage exceeding the rated range is applied, or if an AC power supply is directly connected, the sensor may get burnt or damaged.
- If power is supplied from a commercial switching regulator, ensure that the frame ground (F.G.) terminal of the power supply is connected to an actual ground.
- In case noise generating equipment (switching regulator, inverter motor, etc.) is used in the vicinity of this product, connect the frame ground (F.G.) terminal of the equipment to an actual ground.
- Take care that short-circuit or wrong wiring of the load may burn or damage the sensor.
- Do not run the wires together with high-voltage lines or power lines or put them in the same raceway. This can cause malfunction due to induction.
- Ensure that an isolation transformer is utilized for the DC power supply. If an autotransformer is utilized, the main amplifier or power supply may be damaged.
- Make sure to use the optional quick-connection cable for the connection of the amplifier. Extension up to total 100 m 328.084 ft is possible with 0.3 mm<sup>2</sup>, or more, cable. However, in order to reduce noise, make the wiring as short as possible.

#### Others


- Do not use during the initial transient time (0.5 sec. approx.) after the power supply is switched on.
- Take care that the sensor is not directly exposed to fluorescent light from a rapid-starter lamp or a high frequency lighting device, as it may affect the sensing performance.
- This sensor is suitable for indoor use only.
- Avoid dust, dirt, and steam.
- Take care that the product does not come in direct contact with water, oil, grease, or organic solvents, such as, thinner, etc.
- This sensor cannot be used in an environment containing inflammable or explosive gases.
- Never disassemble or modify the sensor.

# FX-311


## DIMENSIONS (Unit: mm in)

### FX-311 P FX-311 P Amplifier

Mounting drawing with a hand-turned knob attached cover  
FX-AJ1 (Optional)

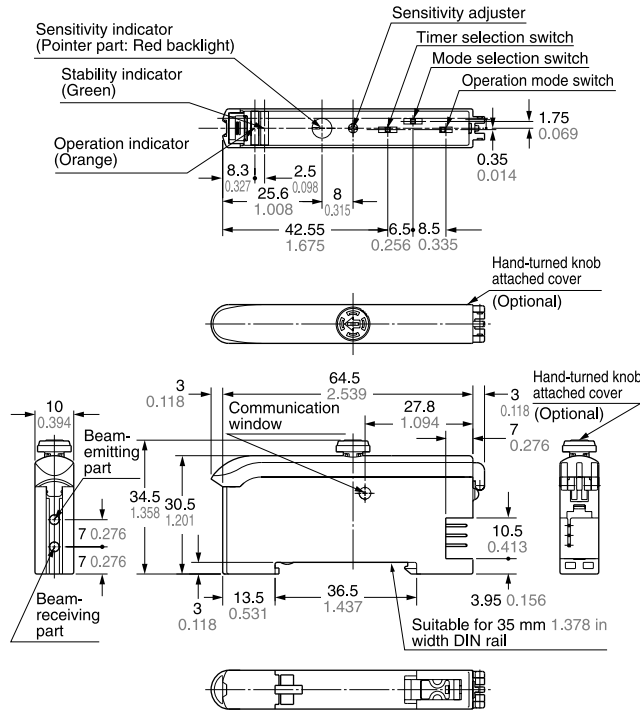


### CN-73-C1 CN-73-C2 CN-73-C5 Main cable (Optional)

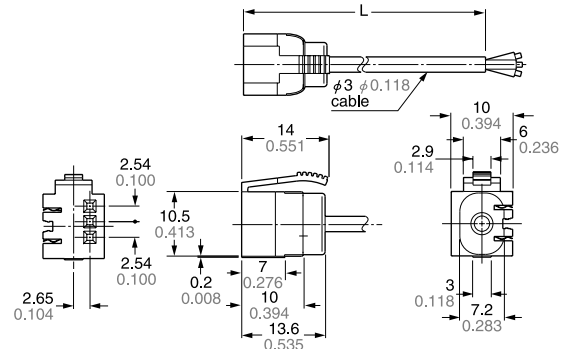

• Length (L)

Model No.	Length (mm in)
CN-73-C1	1,000 39.370
CN-73-C2	2,000 78.740
CN-73-C5	5,000 196.850


### CN-71-C1 CN-71-C2 CN-71-C5 Sub cable (Optional)

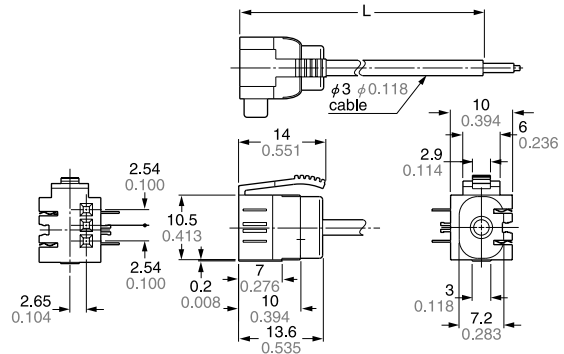

• Length (L)


Model No.	Length (mm in)
CN-71-C1	1,000 39.370
CN-71-C2	2,000 78.740
CN-71-C5	5,000 196.850

### MS-DIN-2 Amplifier mounting bracket (Optional)

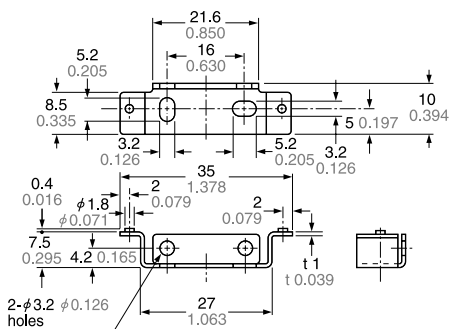

Material: Cold rolled carbon steel (SPCC)  
(Uni-chrome plated)

### MS-DIN-E End plate (Optional)

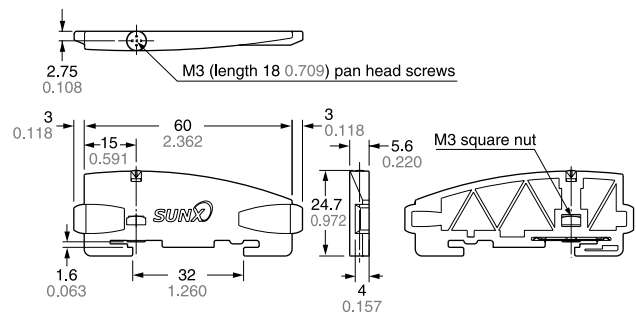

Material: Polycarbonate