



Contactor, 3p+2N/O+2N/C, 1600A/AC1



Powering Business Worldwide™


Part no. DILM1600/22(RAW250)
Article no. 106727
Catalog No. XTCEC16R22B

Delivery programme

| | | | |
|---|----------------|----|--|
| Product range | | | Contactors |
| Application | | | Contactors for Motors |
| Subrange | | | Comfort devices greater than 170 A |
| Utilization category | | | AC-1: Non-inductive or slightly inductive loads, resistance furnaces NAC-3: Normal AC induction motors: starting, switch off during running AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
| Connection technique | | | Screw connection |
| Rated operational current | | | |
| AC-1 | | | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | |
| Open | | | |
| at 40 °C | $I_{th} = I_e$ | A | 2200 |
| Conventional free air thermal current, 1 pole | | | |
| open | I_{th} | A | 4500 |
| Max. rating for three-phase motors, 50 - 60 Hz | | | |
| AC-3 | | | |
| 220 V 230 V | P | kW | 500 |
| 380 V 400 V | P | kW | 900 |
| 660 V 690 V | P | kW | 1600 |
| 1000 V | P | kW | 1770 |
| AC-4 | | | |
| 220 V 230 V | P | kW | 430 |
| 380 V 400 V | P | kW | 750 |
| 660 V 690 V | P | kW | 1300 |
| 1000 V | P | kW | 1650 |
| Contact sequence | | | |
| Can be combined with auxiliary contact | | | DILM820-XHI... |
| Actuating voltage | | | RAW 250 |
| Voltage AC/DC | | | AC operation |
| Contacts | | | |
| N/O = Normally open | | | 2 N/O |
| N/C = Normally closed | | | 2 NC |
| Auxiliary contacts | | | |
| possible variants at auxiliary contact module fitting options | | | on the side: 2 x DILM820-XHI11(V)-SI; 2 x DILM820-XHI11-SA |
| Side mounting auxiliary contacts | | | |
| Instructions | | | integrated suppressor circuit in actuating electronics 660 V, 690 V or 1000 V: not directly reversing |

Technical data

| | | | |
|---------------------------------|------------|---------------|---------------------------------|
| General | | | |
| Standards | | | IEC/EN 60947, VDE 0660, UL, CSA |
| Lifespan, mechanical | | | |
| AC operated | Operations | $\times 10^6$ | 5 |
| DC operated | Operations | $\times 10^6$ | 5 |
| Operating frequency, mechanical | | | |
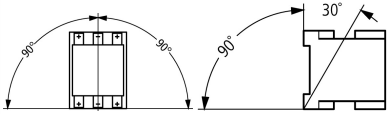
| | | | |
|---|-----------------|------|--|
| AC operated | Operations/h | | 1000 |
| DC operated | Operations/h | | 1000 |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | | |
| Open | °C | | -40 - +60 |
| Enclosed | °C | | -40 - +40 |
| Storage | °C | | -40 - +80 |
| Mounting position | | |  |
| Mechanical shock resistance (IEC/EN 60068-2-27) | | | |
| Half-sinusoidal shock, 10 ms | | | |
| Main contacts | | | |
| N/O contact | g | | 10 |
| Auxiliary contacts | | | |
| N/O contact | g | | 10 |
| N/C contact | g | | 8 |
| Degree of Protection | | | IP00 |
| Weight | | | |
| AC operated | kg | | 32 |
| DC operated | kg | | 32 |
| Weight | kg | | 32 |
| Terminal capacity main cable | | | |
| Busbar | Breite | mm | 100 |
| Main cable connection screw/bolt | | | M12 |
| Tightening torque | | Nm | 35 |
| Terminal capacity control circuit cables | | | |
| Solid | mm ² | | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Flexible with ferrule | mm ² | | 1 x (0.75 - 2.5) 2 x (0.75 - 2.5) |
| Solid or stranded | AWG | | 2 x (18...12) |
| Control circuit cable connection screw/bolt | | | M3.5 |
| Tightening torque | | Nm | 1.2 |
| Tool | | | |
| Main cable | | | |
| Open-end spanner | | mm | 18 |
| Control circuit cables | | | |
| Pozidriv screwdriver | | Size | 2 |

Main conducting paths

| | | | |
|--|-----------|------|-------|
| Rated impulse withstand voltage | U_{imp} | V AC | 8000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated insulation voltage | U_i | V AC | 1000 |
| Rated operational voltage | U_e | V AC | 1000 |
| Safe isolation to EN 61140 | | | |
| between coil and contacts | | V AC | 500 |
| between the contacts | | V AC | 500 |
| Making capacity (p.f. to IEC/EN 60947) | | A | 19000 |
| Breaking capacity | | | |
| 220 V 230 V | | A | 16000 |
| 380 V 400 V | | A | 16000 |
| 500 V | | A | 16000 |
| 660 V 690 V | | A | 16000 |
| 1000 V | | A | 5800 |
| Component lifespan | | | |

AC

| | | | |
|---|----------------|-----|--|
| AC-1 | | | |
| Rated operational current | | | |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz | | | |
| Open | | | |
| at 40 °C | $I_{th} = I_e$ | A | 2200 |
| at 50 °C | $I_{th} = I_e$ | A | 1970 |
| at 55 °C | $I_{th} = I_e$ | A | 1880 |
| at 60 °C | $I_{th} = I_e$ | A | 1800 |
| Conventional free air thermal current, 1 pole | | | |
| Note | | | |
| | | | at maximum permissible ambient air temperature |
| open | I_{th} | A | 4500 |
| AC-3 | | | |
| Rated operational current | | | |
| Open, 3-pole: 50 – 60 Hz | | | |
| 220 V 230 V | I_e | A | 1600 |
| 240 V | I_e | A | 1600 |
| 415 V | I_e | A | 1600 |
| 440V | I_e | A | 1600 |
| 500 V | I_e | A | 1600 |
| 660 V 690 V | I_e | A | 1600 |
| 1000 V | I_e | A | 1200 |
| Motor rating | | | |
| 220 V 230 V | P | kWh | |
| 240V | P | kW | 500 |
| 380 V 400 V | P | kW | 900 |
| 415 V | P | kW | 930 |
| 440 V | P | kW | 1000 |
| 500 V | P | kW | 1180 |
| 660 V 690 V | P | kW | 1600 |
| 1000 V | P | kW | 1770 |
| AC-4 | | | |
| Rated operational current | | | |
| Open, 3-pole: 50 – 60 Hz | | | |
| 220 V 230 V | I_e | A | 1280 |
| 240 V | I_e | A | 1280 |
| 380 V 400 V | I_e | A | 1280 |
| 415 V | I_e | A | 1280 |
| 440 V | I_e | A | 1280 |
| 500 V | I_e | A | 1280 |
| 660 V 690 V | I_e | A | 1280 |
| 1000 V | I_e | A | 1120 |
| Motor rating | | | |
| 220 V 230 V | P | kWh | |
| 240 V | P | kW | 430 |
| 380 V 400 V | P | kW | 750 |
| 415 V | P | kW | 770 |
| 440 V | P | kW | 830 |
| 500 V | P | kW | 940 |
| 660 V 690 V | P | kW | 1300 |
| 1000 V | P | kW | 1650 |

Current heat loss

| | | |
|---|---|-----|
| 3-pole at I_{th} | W | 155 |
| Current heat loss at I_{th} to AC-3/400 V | W | 123 |

Magnet systems

| | | | |
|--|----------|------------|--|
| Voltage tolerance | | $x U_c$ | |
| U_c | | | 230 - 250 V 50/60 Hz 110 - 350 V DC |
| AC operated | Pick-up | $x U_c$ | $0.7 \times U_{c \min} - 1.15 \times U_{c \max}$ |
| DC operated | Pick-up | $x U_c$ | $0.7 \times U_{c \min} - 1.15 \times U_{c \max}$ |
| AC operated | Drop-out | $x U_c$ | $0.2 \times U_{c \min} - 0.6 \times U_{c \max}$ |
| DC operated | Drop-out | $x U_c$ | $0.2 \times U_{c \min} - 0.6 \times U_{c \max}$ |
| Power consumption of the coil in a cold state and $1.0 \times U_c$ | | | |
| Note on power consumption | | | Control transformer with $u_k \leq 0.7$ |
| Pull-in power | Pick-up | VA | 1600 |
| Pull-in power | Pick-up | W | 1400 |
| Sealing power | Sealing | VA | 15 |
| Sealing power | Sealing | W | 13 |
| Duty factor | | % DF | 100 |
| Switching times at 100 % U_c (approximate values) | | | |
| Main contacts | | | |
| Closing delay | | ms | 70 |
| Opening delay | | ms | 40 |
| Behaviour in marginal and transitional conditions | | | |
| Sealing | | | |
| Voltage interruptions | | | |
| $(0 \dots 0.2 \times U_{c \min}) \leq 10 \text{ ms}$ | | | Time is bridged successfully |
| $(0 \dots 0.2 \times U_{c \min}) > 10 \text{ ms}$ | | | Drop-out of the contactor |
| Voltage drops | | | |
| $(0.2 \dots 0.6 \times U_{c \min}) \leq 12 \text{ ms}$ | | | Time is bridged successfully |
| $(0.2 \dots 0.6 \times U_{c \min}) > 12 \text{ ms}$ | | | Drop-out of the contactor |
| $(0.6 \dots 0.7 \times U_{c \min})$ | | | Contactor remains switched on |
| Excess voltage | | | |
| $(1.15 \dots 1.3 \times U_{c \max})$ | | | Contactor remains switched on |
| Pick-up phase | | | |
| $(0 \dots 0.7 \times U_{c \min})$ | | | Contactor does not switch on |
| $(0.7 \times U_{c \min} \dots 1.15 \times U_{c \max})$ | | | Contactor switches on with certainty |
| Admissible transitional contact resistance (of the external control circuit device when actuating A11) | | m Ω | ≤ 500 |
| PLC signal level (A3 - A4) to IEC/EN 61131-2 (type 2) | | | |
| High | | V | 15 |
| Low | | V | 5 |

Electromagnetic compatibility (EMC)

| | | | |
|-------------------------------|--|--|--|
| Electromagnetic compatibility | | | This product is designed for operation in industrial environments (environment 2). The use in residential environments (environment 1) could cause electrical interference so that addition suppression must be planned. |
|-------------------------------|--|--|--|

Design verification as per IEC/EN 61439

| | | | |
|--|------------|--------------------|------|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 1600 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 41 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 13 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | $^{\circ}\text{C}$ | -40 |
| Operating ambient temperature max. | | $^{\circ}\text{C}$ | 60 |

| | | |
|--|--|--|
| IEC/EN 61439 design verification | | |
| 10.2 Strength of materials and parts | | |
| 10.2.2 Corrosion resistance | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | |
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 6.0

| | | |
|--|----|-----------------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066) | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss8.1-27-37-10-03 [AAB718012]) | | |
| Rated control supply voltage U_s at AC 50HZ | V | 230 - 250 |
| Rated control supply voltage U_s at AC 60HZ | V | 230 - 250 |
| Rated control supply voltage U_s at DC | V | 230 - 250 |
| Voltage type for actuating | | AC/DC |
| Rated operation current I_e at AC-1, 400 V | A | 2200 |
| Rated operation current I_e at AC-3, 400 V | A | 1600 |
| Rated operation power at AC-3, 400 V | kW | 900 |
| Rated operation current I_e at AC-4, 400 V | A | 1280 |
| Rated operation power I_e at AC-4, 400 V | kW | 750 |
| Modular version | | No |
| Number of auxiliary contacts as normally open contact | | 2 |
| Number of auxiliary contacts as normally closed contact | | 2 |
| Type of electrical connection of main circuit | | Rail connection |
| Number of normally closed contacts as main contact | | 0 |
| Number of main contacts as normally open contact | | 3 |

Approvals

| | | |
|--------------------------------------|--|---|
| Product Standards | | IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking |
| UL File No. | | E29096 |
| UL Category Control No. | | NLDX |
| CSA File No. | | 012528 |
| CSA Class No. | | 3211-04 |
| North America Certification | | UL listed, CSA certified |
| Specially designed for North America | | No |

Characteristics

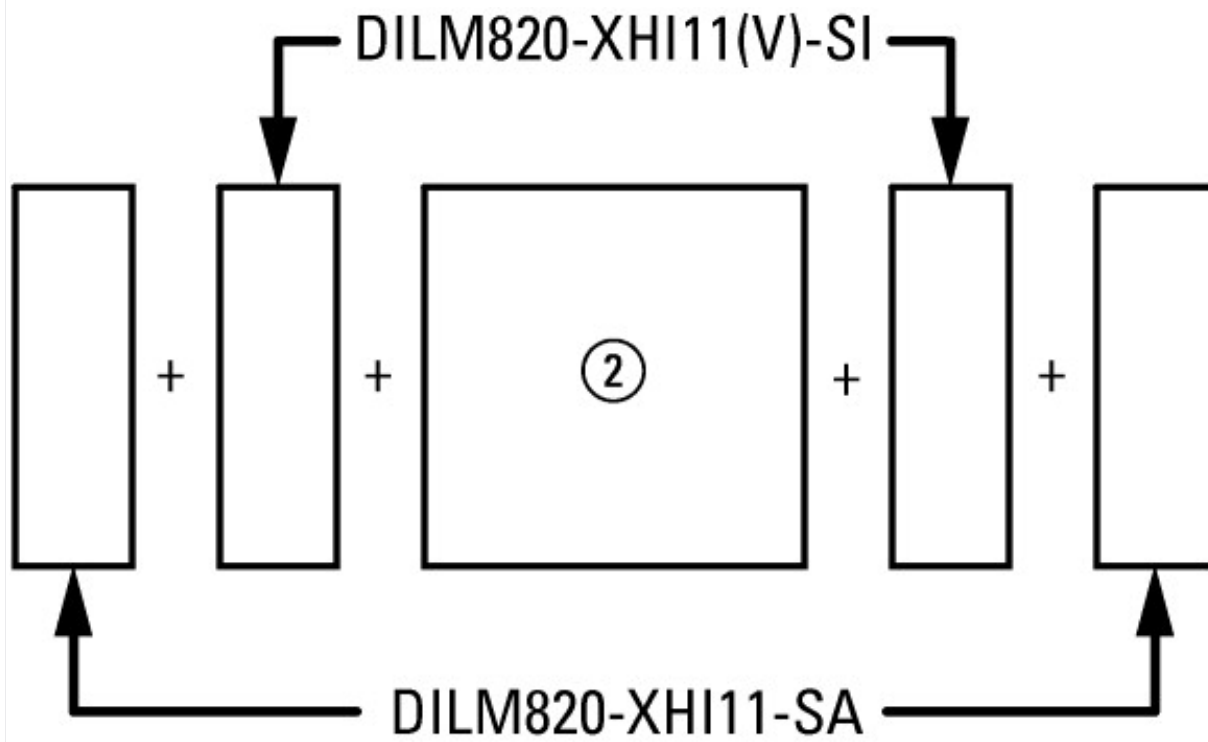

on the side: 2 x DILM820-XHI11(V)-SI; 2 x DILM820-XHI11-SA



- Normal switching duty
- Normal AC induction motor
- Operating characteristics
- Switch on: from stop
- Switch off: during run
- Electrical characteristics:
- Switch on: up to 6 x Rated motor current
- Switch off: up to 1 x Rated motor current
- Utility category
- 100 % AC-3
- Typical Applications
- Compressors
- Lifts
- Mixers
- Pumps
- Escalators
- Agitators
- fan
- Conveyor belts
- Centrifuges
- Hinged flaps
- Bucket-elevator
- Air-conditioning systems
- General drives for manufacturing and processing machines




Extreme switching duty
 Squirrel-cage motor
 Operating characteristics
 Inching, plugging, reversing
 Electrical characteristics
 Make: up to 6 x rated motor current
 Break: up to 6 x rated motor current
 Utilization category
 100 % AC-4
 Typical applications
 Printing presses
 Wire-drawing machines
 Centrifuges
 Special drives for manufacturing and processing machines

Switching duty for non-motor loads, 3-pole, 4-pole
 Operating characteristics
 Non-inductive or slightly inductive loads
 Electrical characteristics
 Make: 1 x rated current
 Break: 1 x rated current
 Utilization category
 100 % AC-1
 Typical applications
 Electric heat

Short-time loading, 3-pole
 Time interval between two loading cycles: 15 minutes

Dimensions

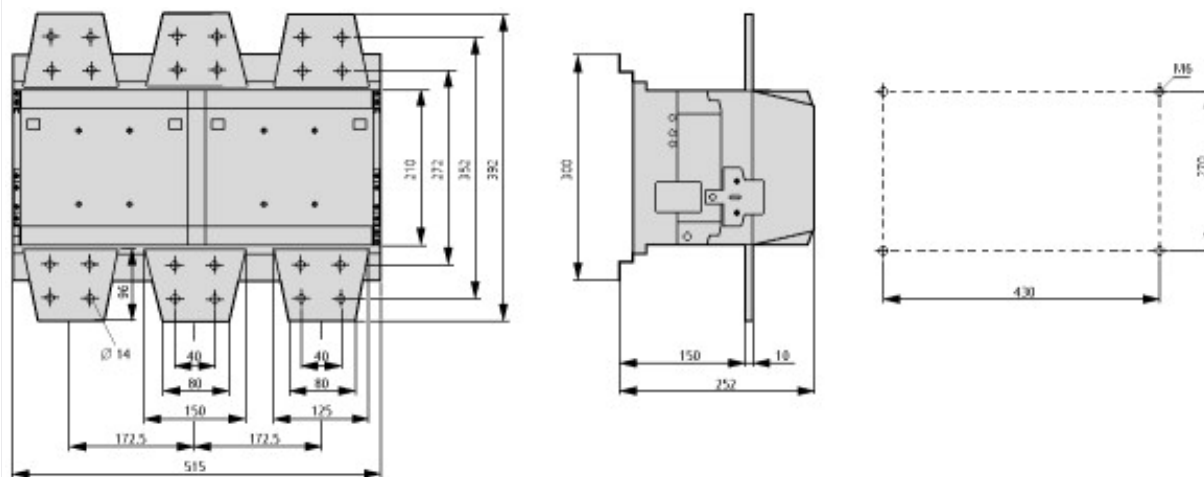

① DILM820-XHI11(V)-SI

② DILM820-XHI11-SA

DILM1600
DILH2000, DILH2200

Additional product information (links)

IL03406004Z (AWA2100-2109) Contactors > 170 A

| | |
|--|---|
| IL03406004Z (AWA2100-2109) Contactors > 170 A | ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03406004Z2013_05.pdf |
| UL/CSA: Approved rating data | http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.84 |
| UL/CSA: UL/CSA: Short Circuit Current Rating (SCCR) | http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.86 |
| Switchgear of Power Factor Correction Systems | http://www.moeller.net/binary/ver_techpapers/ver934en.pdf |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely | http://www.moeller.net/binary/ver_techpapers/ver938en.pdf |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | http://www.moeller.net/binary/ver_techpapers/ver944en.pdf |
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors | http://www.moeller.net/binary/ver_techpapers/ver949en.pdf |
| Motor starters and "Special Purpose Ratings" for the North American market | http://www.moeller.net/binary/ver_techpapers/ver953en.pdf |
| Switchgear for Luminaires | http://www.moeller.net/binary/ver_techpapers/ver955en.pdf |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | http://www.moeller.net/binary/ver_techpapers/ver956en.pdf |
| The Interaction of Contactors with PLCs | http://www.moeller.net/binary/ver_techpapers/ver957en.pdf |
| Busbar Component Adapters for modern Industrial control panels | http://www.moeller.net/binary/ver_techpapers/ver960en.pdf |