





**Contactor, 3p+1N/C, 3kW/400V/AC3**


**Part no. DILM7-01(48VDC)**  
**Article no. 276601**  
**Catalog No. XTCE007B01WD**

## Delivery programme

|   |                |    |  |  |
|---|----------------|----|--|--|
| Product range   |                |    |  | Contactors   |
| Application   |                |    |  | Contactors for Motors  |
| Subrange  |                |    |  | Contactors up to 170 A, 3 pole   |
| Utilization category                                      |                |    |  | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
|   |                |    |  |    |
| Notes   |                |    |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.  |
| Connection technique                                      |                |    |  | Screw terminals  |
| Pole  |                |    |  | 3 pole   |
| <b>Rated operational current</b>                          |                |    |  |  |
| AC-3  |                |    |  |  |
| 380 V 400 V   | $I_e$          | A  |  | 7  |
| AC-1  |                |    |  |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |    |  |  |
| Open  |                |    |  |  |
| at 40 °C  | $I_{th} = I_e$ | A  |  | 22   |
| enclosed  | $I_{th}$       | A  |  | 18   |
| Conventional free air thermal current, 1 pole             |                |    |  |  |
| open  | $I_{th}$       | A  |  | 50   |
| enclosed  | $I_{th}$       | A  |  | 45   |
| <b>Max. rating for three-phase motors, 50 - 60 Hz</b>     |                |    |  |  |
| AC-3  |                |    |  |  |
| 220 V 230 V   | P              | kW |  | 2.2  |
| 380 V 400 V   | P              | kW |  | 3  |
| 660 V 690 V   | P              | kW |  | 3.5  |
| AC-4  |                |    |  |  |
| 220 V 230 V   | P              | kW |  | 1  |
| 380 V 400 V   | P              | kW |  | 2.2  |
| 660 V 690 V   | P              | kW |  | 2.9  |
| <b>Contacts</b>   |                |    |  |  |
| N/C = Normally closed                                     |                |    |  | 1 NC   |
| Contact sequence  |                |    |  |    |
| <strong>Instructions</strong>                             |                |    |  | Contacts to EN 50012.<br>Integrated varistor suppressor circuit.<br>with mirror contact.   |
| Can be combined with auxiliary contact                    |                |    |  | DILA-XHI(V)..  |
| Voltage AC/DC   |                |    |  | DC operation   |

## Technical data

|                      |  |  |  |                                 |
|----------------------|--|--|--|---------------------------------|
| <b>General</b>       |  |  |  |                                 |
| Standards            |  |  |  | IEC/EN 60947, VDE 0660, UL, CSA |
| Lifespan, mechanical |  |  |  |                                 |
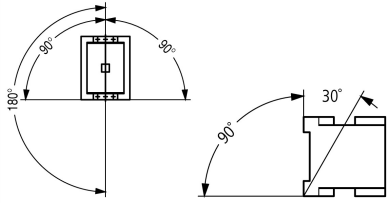
|  |              |                 |  |
|--|--------------|-----------------|--|
| AC operated  | Operations   | $\times 10^6$   | 10   |
| DC operated  | Operations   | $\times 10^6$   | 10   |
| Operating frequency, mechanical  |              |                 |  |
| AC operated  | Operations/h |                 | 5000   |
| DC operated  | Operations/h |                 | 5000   |
| Climatic proofing  |              |                 |  |
| Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |              |                 |  |
| Ambient temperature  |              | °C              |  |
| Open   |              | °C              | -25 - +60  |
| Enclosed   |              | °C              | -25 - 40   |
| Storage  |              | °C              | -40 - 80   |
| Mounting position  |              |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                                |              |                 |  |
| Half-sinusoidal shock, 10 ms   |              |                 |  |
| Main contacts  |              |                 |  |
| N/O contact  |              | g               | 10   |
| Auxiliary contacts   |              |                 |  |
| N/O contact  |              | g               | 7  |
| N/C contact  |              | g               | 5  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted          |              |                 |  |
| Half-sinusoidal shock, 10 ms   |              |                 |  |
| Main contacts  |              |                 |  |
| N/O contact  |              | g               | 5.7  |
| Auxiliary contacts   |              |                 |  |
| N/O contact  |              | g               | 3.4  |
| N/C contact  |              | g               | 3.4  |
| Degree of Protection   |              |                 |  |
|  |              |                 | IP20   |
| Protection against direct contact when actuated from front (EN 50274)          |              |                 |  |
|  |              |                 | Finger and back-of-hand proof  |
| Weight   |              |                 |  |
| AC operated  |              | kg              | 0.23   |
| DC operated  |              | kg              | 0.28   |
| Terminal capacity main cable   |              |                 |  |
| Solid  |              | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule  |              | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)   |
| Also without ferrule.  |              |                 |  |
| Solid or stranded  |              | AWG             | 18 - 10  |
| Main cable connection screw/bolt   |              |                 |  |
|  |              |                 | M3.5   |
| Tightening torque  |              |                 |  |
|  |              |                 | Nm 1.2   |
| Terminal capacity control circuit cables                                       |              |                 |  |
| Solid  |              | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule  |              | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5)   |
| Solid or stranded  |              | AWG             | 18 - 14  |
| Control circuit cable connection screw/bolt                                    |              |                 |  |
|  |              |                 | M3.5   |
| Tightening torque  |              |                 |  |
|  |              |                 | Nm 1.2   |
| Tool   |              |                 |  |
| Main cable   |              |                 |  |
| Pozidriv screwdriver   |              | Size            | 2  |
| Standard screwdriver   |              | mm              | 0.8 x 5.5<br>1 x 6   |

|  |  |                 |                                      |
|--|--|-----------------|--------------------------------------|
| Control circuit cables                   |  |                 |                                      |
| Pozidriv screwdriver                     |  | Size            | 2                                    |
| Standard screwdriver                     |  | mm              | 0.8 x 5.5<br>1 x 6                   |
| Terminal capacity main cable             |  |                 |                                      |
| Solid                                    |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| flexible                                 |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| flexible with ferrules                   |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5) |
| Solid or stranded                        |  | AWG             | 18 - 14                              |
| Terminal capacity control circuit cables |  |                 |                                      |
| Solid                                    |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Flexible                                 |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Flexible with ferrule                    |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5) |
| Solid or stranded                        |  | AWG             | 18 - 14                              |
| Tool                                     |  |                 |                                      |
| Stripping length                         |  | mm              | 10                                   |
| Screwdriver blade width                  |  | mm              | 3.5                                  |

### Main conducting paths

|  |                |      |       |
|--|----------------|------|-------|
| Rated impulse withstand voltage        | $U_{imp}$      | V AC | 8000  |
| Overvoltage category/pollution degree  |                |      | III/3 |
| Rated insulation voltage               | $U_i$          | V AC | 690   |
| Rated operational voltage              | $U_e$          | V AC | 690   |
| Safe isolation to EN 61140             |                |      |       |
| between coil and contacts              |                | V AC | 400   |
| between the contacts                   |                | V AC | 400   |
| Making capacity (p.f. to IEC/EN 60947) |                |      |       |
|  | $U_p$ to 690 V | A    | 112   |
| Breaking capacity                      |                |      |       |
| 220 V 230 V                            |                | A    | 70    |
| 380 V 400 V                            |                | A    | 70    |
| 500 V                                  |                | A    | 50    |
| 660 V 690 V                            |                | A    | 40    |
| Short-circuit rating                   |                |      |       |
| Short-circuit protection maximum fuse  |                |      |       |
| Type "2" coordination                  |                |      |       |
| 400 V                                  | gG/gL 500 V    | A    | 20    |
| 690 V                                  | gG/gL 690 V    | A    | 16    |
| Type "1" coordination                  |                |      |       |
| 400 V                                  | gG/gL 500 V    | A    | 35    |
| 690 V                                  | gG/gL 690 V    | A    | 20    |

### AC

|   |                |   |    |
|---|----------------|---|----|
| AC-1  |                |   |    |
| Rated operational current                                 |                |   |    |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |    |
| Open  |                |   |    |
| at 40 °C  | $I_{th} = I_e$ | A | 22 |
| at 50 °C  | $I_{th} = I_e$ | A | 21 |
| at 55 °C  | $I_{th} = I_e$ | A | 21 |
| at 60 °C  | $I_{th} = I_e$ | A | 20 |
| enclosed  | $I_{th}$       | A | 18 |
| Conventional free air thermal current, 1 pole             |                |   |    |
| open  | $I_{th}$       | A | 50 |

|                                 |          |     |     |
|---------------------------------|----------|-----|-----|
| enclosed                        | $I_{th}$ | A   | 45  |
| <b>AC-3</b>                     |          |     |     |
| Rated operational current       |          |     |     |
| Open, 3-pole: 50 – 60 Hz        |          |     |     |
| 220 V 230 V                     | $I_e$    | A   | 7   |
| 240 V                           | $I_e$    | A   | 7   |
| 380 V 400 V                     | $I_e$    | A   | 7   |
| 415 V                           | $I_e$    | A   | 7   |
| 440V                            | $I_e$    | A   | 7   |
| 500 V                           | $I_e$    | A   | 5   |
| 660 V 690 V                     | $I_e$    | A   | 4   |
| 380 V 400 V                     | $I_e$    | A   | 7   |
| Motor rating                    |          |     |     |
| 220 V 230 V                     | P        | kWh |     |
| 240V                            | P        | kW  | 2.2 |
| 380 V 400 V                     | P        | kW  | 2.2 |
| 415 V                           | P        | kW  | 3   |
| 440 V                           | P        | kW  | 4   |
| 500 V                           | P        | kW  | 4.5 |
| 660 V 690 V                     | P        | kW  | 3.5 |
| <b>AC-4</b>                     |          |     |     |
| Open, 3-pole: 50 – 60 Hz        |          |     |     |
| 220 V 230 V                     | $I_e$    | A   | 5   |
| 240 V                           | $I_e$    | A   | 5   |
| 380 V 400 V                     | $I_e$    | A   | 5   |
| 415 V                           | $I_e$    | A   | 5   |
| 440 V                           | $I_e$    | A   | 5   |
| 500 V                           | $I_e$    | A   | 4.5 |
| 660 V 690 V                     | $I_e$    | A   | 4   |
| Motor rating                    |          |     |     |
| 220 V 230 V                     | P        | kWh |     |
| 240 V                           | P        | kW  | 1   |
| 380 V 400 V                     | P        | kW  | 1.5 |
| 415 V                           | P        | kW  | 2.2 |
| 440 V                           | P        | kW  | 2.3 |
| 500 V                           | P        | kW  | 2.4 |
| 660 V 690 V                     | P        | kW  | 2.5 |
| 660 V 690 V                     | P        | kW  | 2.9 |
| <b>DC</b>                       |          |     |     |
| Rated operational current, open |          |     |     |
| <b>DC-1</b>                     |          |     |     |
| 60 V                            | $I_e$    | A   | 20  |
| 110 V                           | $I_e$    | A   | 20  |
| 220 V                           | $I_e$    | A   | 15  |
| 440 V                           | $I_e$    | A   | 1   |
| <b>DC-3</b>                     |          |     |     |
| 60 V                            | $I_e$    | A   | 20  |
| 110 V                           | $I_e$    | A   | 20  |
| 220 V                           | $I_e$    | A   | 1.5 |
| 440 V                           | $I_e$    | A   | 0.2 |
| <b>DC-5</b>                     |          |     |     |
| 60 V                            | $I_e$    | A   | 20  |
| 110 V                           | $I_e$    | A   | 20  |
| 220 V                           | $I_e$    | A   | 1.5 |

|  |               |               |   |
|--|---------------|---------------|---|
| 440 V  | $I_e$         | A             | 0.2   |
| <b>Current heat loss</b>   |               |               |   |
| 3-pole at $I_{th}$   |               | W             | 3   |
| Current heat loss at $I_e$ to AC-3/400 V                           |               | W             | 0.37  |
| Impedance per pole   |               | m $\Omega$    | 2.5   |
| <b>Magnet systems</b>  |               |               |   |
| Voltage tolerance  |               | $\times U_c$  |   |
| AC operated  | Pick-up       | $\times U_c$  | 0.8 - 1.1   |
| Drop-out voltage AC operated                                       | Drop-out      | $\times U_c$  | 0.3 - 0.6   |
| DC operated  | Pick-up       | $\times U_c$  | 0.8 - 1.1   |
| Notes  |               |               | 0.85 - 1.1 only with auxiliary contact module with 3 or more N/C contacts           |
| DC operated  | Drop-out      | $\times U_c$  | 0.15 - 0.6  |
| Notes  |               |               | at least smoothed two-phase bridge rectifier or three-phase rectifier               |
| Power consumption of the coil in a cold state and $1.0 \times U_c$ |               |               |   |
| 50 Hz  | Pick-up       | VA            | 24  |
| 50 Hz  | Sealing       | VA            | 3.4   |
| 50 Hz  | Sealing       | W             | 1.2   |
| 60 Hz  | Pick-up       | VA            | 30  |
| 60 Hz  | Sealing       | VA            | 4.4   |
| 60 Hz  | Sealing       | W             | 1.4   |
| 50/60 Hz   | Pick-up       | VA            | 27<br>25  |
| 50/60 Hz   | Sealing       | VA            | 4.2<br>3.3  |
| 50/60 Hz   | Sealing       | W             | 1.4<br>1.2  |
| DC operated  | Pick-up       | W             | 3   |
| DC operated  | Sealing       | W             | 3   |
| Duty factor  |               | % DF          | 100   |
| Switching times at 100 % $U_c$ (approximate values)                |               |               |   |
| Main contacts  |               |               |   |
| AC operated  |               |               |   |
|  | Closing delay | ms            | 15 - 21   |
|  | Opening delay | ms            | 9 - 18  |
| DC operated  |               |               |   |
|  | Closing delay | ms            | 31  |
|  | Opening delay | ms            | 12  |
|  | Arcing time   | ms            | 10  |
| Lifespan, mechanical; Coil 50/60 Hz                                |               | $\times 10^6$ | Mechanical lifespan at 50 Hz approx. 30% lower than under "Technical data, general" |
| <b>Electromagnetic compatibility (EMC)</b>                         |               |               |   |
| Emitted interference   |               |               | to EN 60947-1   |
| Interference immunity  |               |               | to EN 60947-1   |

## Design verification as per IEC/EN 61439

|  |            |                    |  |
|--|------------|--------------------|--|
| Technical data for design verification                   |            |                    |  |
| Rated operational current for specified heat dissipation | $I_n$      | A                  | 7  |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W                  | 0.1  |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W                  | 0  |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W                  | 2.6  |
| Heat dissipation capacity                                | $P_{diss}$ | W                  | 0  |
| Operating ambient temperature min.                       |            | $^{\circ}\text{C}$ | -25  |
| Operating ambient temperature max.                       |            | $^{\circ}\text{C}$ | 60   |
| IEC/EN 61439 design verification                         |            |                    |  |
| 10.2 Strength of materials and parts                     |            |                    |  |
| 10.2.2 Corrosion resistance                              |            |                    |  |
|  |            |                    | Meets the product standard's requirements. |

|  |  |  |
|--|--|--|
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 5.0


|  |    |                  |
|--|----|------------------|
| Low-voltage industrial components (EG000017) / Magnet contactor, AC-switching (EC000066)   |    |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss8-27-37-10-03 [AAB718011]) |    |                  |
| Rated control supply voltage $U_s$ at AC 50HZ  | V  | 0 - 0            |
| Rated control supply voltage $U_s$ at AC 60HZ  | V  | 0 - 0            |
| Rated control supply voltage $U_s$ at DC   | V  | 48 - 48          |
| Voltage type for actuating   |    | DC               |
| Rated operation current $I_e$ at AC-1, 400 V   | A  | 14               |
| Rated operation current $I_e$ at AC-3, 400 V   | A  | 7                |
| Rated operation power at AC-3, 400 V   | kW | 3                |
| Rated operation current $I_e$ at AC-4, 400 V   | A  | 5                |
| Rated operation power $I_e$ at AC-4, 400 V   | kW | 2.2              |
| Modular version  |    | No               |
| Number of auxiliary contacts as normally open contact  |    | 0                |
| Number of auxiliary contacts as normally closed contact  |    | 1                |
| Connection type main current circuit   |    | Screw connection |
| Number of normally closed contacts as main contact   |    | 0                |
| Number of main contacts as normally open contact   |    | 3                |

## Approvals

|                                      |  |   |
|--------------------------------------|--|---|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking |
| UL File No.                          |  | E29096  |
| UL Category Control No.              |  | NLDX  |
| CSA File No.                         |  | 012528  |
| CSA Class No.                        |  | 2411-03, 3211-04  |
| North America Certification          |  | UL listed, CSA certified                                  |
| Specially designed for North America |  | No  |



- 1: Overload relay
- 2: Suppressor
- 3: Auxiliary contact modules

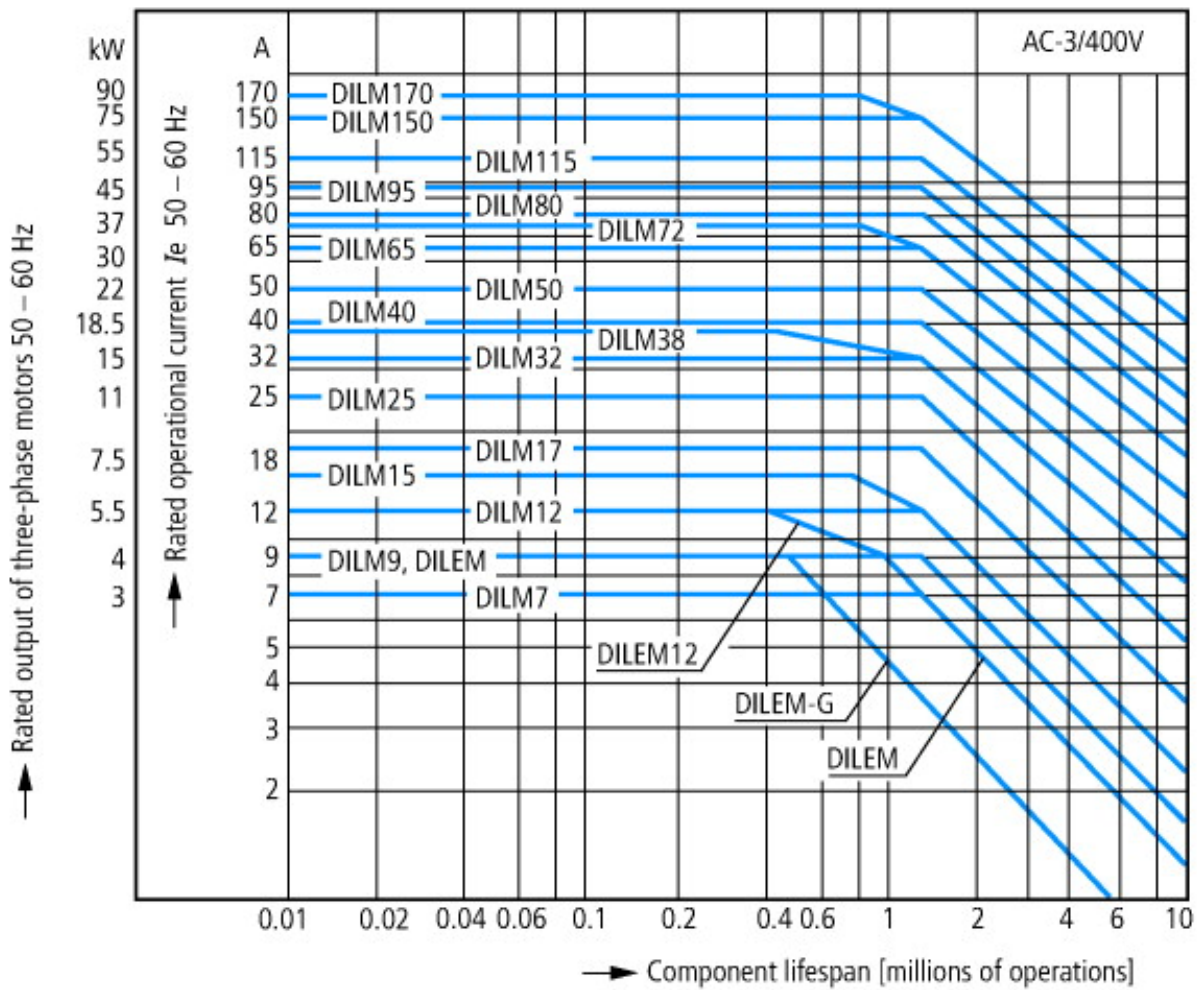


- Squirrel-cage motor
- Operating characteristics
- Starting: from rest
- Stopping: after attaining full running speed
- Electrical characteristics
- Make: up to 6 x rated motor current
- Break: up to 1 x rated motor current
- Utilization category
- 100 % AC-3
- Typical applications
- Compressors
- Lifts
- Mixers
- Pumps
- Escalators
- Agitators
- Fans
- Conveyor belts
- Centrifuges
- Hinged flaps
- Bucket-elevators
- Air conditioning system
- General drives in manufacturing and processing machines






- Extreme switching duty
- Squirrel-cage motor
- Operating characteristics
- Inching, plugging, reversing
- Electrical characteristics
- Make: up to 6 x rated motor current
- Break: up to 6 x rated motor current
- Utilization category
- 100 % AC-4
- Typical applications
- Printing presses
- Wire-drawing machines
- Centrifuges
- Special drives for manufacturing and processing machines

## Dimensions

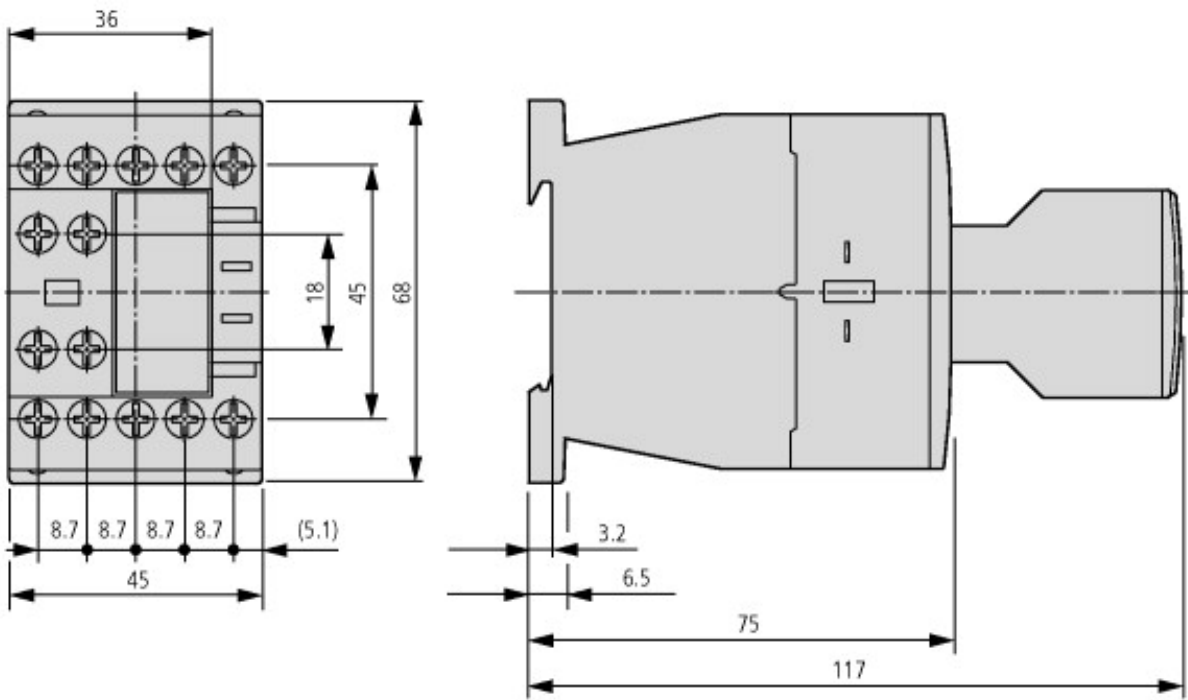

Contacteur with auxiliary contact module

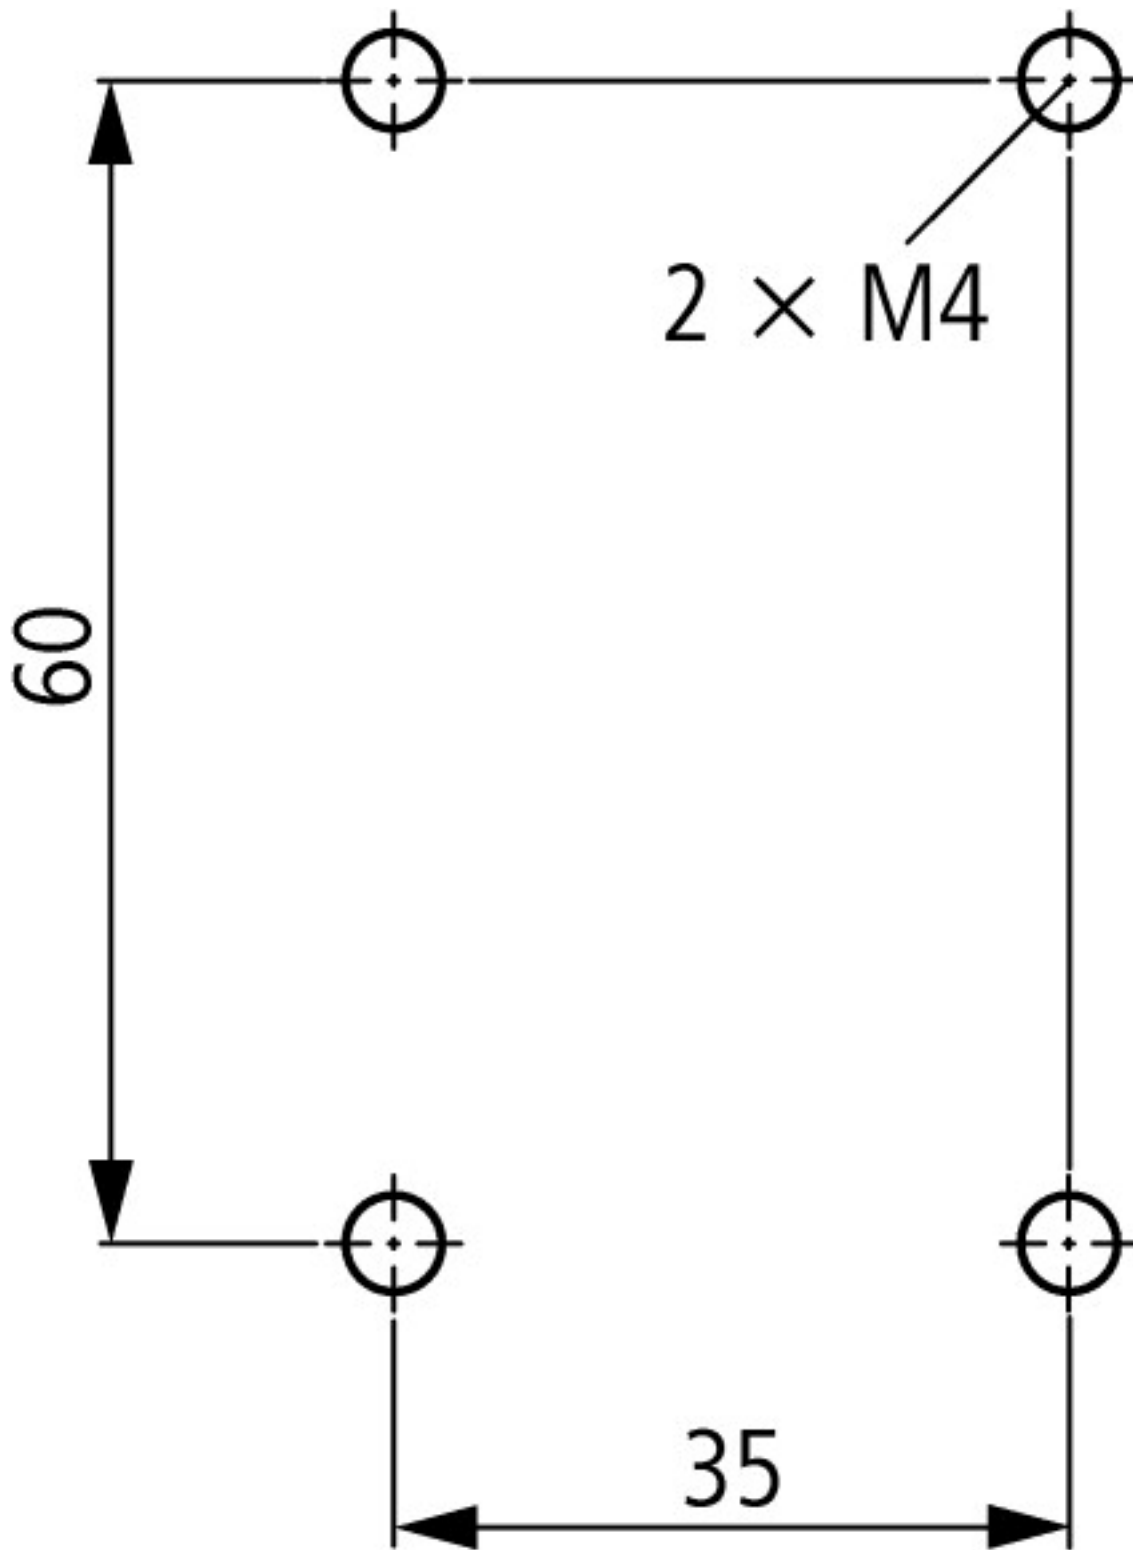

DILM7...DILM15  
 DILA...  
 Contactor with auxiliary contact module

### Additional product information (links)

#### IL03407013Z (AWA2100-2126) Contactors

|  |   |
|--|---|
| IL03407013Z (AWA2100-2126) Contactors  | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf</a> |
| UL/CSA: Approved rating data   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.84">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.84</a>             |
| UL/CSA: UL/CSA: Special Purpose Rating   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.85">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.85</a>             |
| UL/CSA: UL/CSA: Short Circuit Current Rating (SCCR)  | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.86">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.86</a>             |
| Switchgear of Power Factor Correction Systems  | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>                                     |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely               | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>                                     |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>                                     |

|  |   |
|--|---|
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a> |
| Motor starters and "Special Purpose Ratings" for the North American market                     | <a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a> |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |