




**Contactors, 4p, 63A/AC1**

**Part no.** DILMP63(\*V60HZ)  
**Article no.** 109846  
**Catalog No.** -

## Delivery programme

|                                                           |                |   |                                                                                                                                                |
|-----------------------------------------------------------|----------------|---|------------------------------------------------------------------------------------------------------------------------------------------------|
| Product range                                             |                |   | Contactors                                                                                                                                     |
| Application                                               |                |   | Contactors for 4 pole electric consumers                                                                                                       |
| Subrange                                                  |                |   | Contactors up to 200 A, 4 pole                                                                                                                 |
| Utilization category                                      |                |   | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running |
| Connection technique                                      |                |   | Screw terminals                                                                                                                                |
| Pole                                                      |                |   | 4 pole                                                                                                                                         |
| <b>Rated operational current</b>                          |                |   |                                                                                                                                                |
| AC-1                                                      |                |   |                                                                                                                                                |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |                                                                                                                                                |
| at 40 °C                                                  | $I_{th} = I_e$ | A | 63                                                                                                                                             |
| at 50 °C                                                  | $I_{th} = I_e$ | A | 60                                                                                                                                             |
| at 60 °C                                                  | $I_{th} = I_e$ | A | 54                                                                                                                                             |
| Contact sequence                                          |                |   |                                                              |
| For use with                                              |                |   | DILM150-XHI(A)(V)...<br>or<br>DILM1000-XHI11-SA<br>or<br>DILM1000-XHI(V)11-SI                                                                  |
| Actuating voltage                                         |                |   | *V 60 Hz                                                                                                                                       |
| Voltage AC/DC                                             |                |   | AC operation                                                                                                                                   |
| <strong>Instructions</strong>                             |                |   | Contacts to EN 50012.                                                                                                                          |

## Technical data

|                                                        |              |               |                                                                                      |
|--------------------------------------------------------|--------------|---------------|--------------------------------------------------------------------------------------|
| <b>General</b>                                         |              |               |                                                                                      |
| Standards                                              |              |               | IEC/EN 60947, VDE 0660, UL, CSA                                                      |
| Lifespan, mechanical                                   |              |               |                                                                                      |
| AC operated                                            | Operations   | $\times 10^6$ | 10                                                                                   |
| DC operated                                            | Operations   | $\times 10^6$ | 10                                                                                   |
| Operating frequency, mechanical                        |              |               |                                                                                      |
| AC operated                                            | Operations/h |               | 5000                                                                                 |
| DC operated                                            | Operations/h |               | 5000                                                                                 |
| Climatic proofing                                      |              |               | Damp heat, constant, to IEC 60068-2-3<br>Damp heat, cyclic, to IEC 60068-2-30        |
| Ambient temperature                                    |              | °C            |                                                                                      |
| Open                                                   |              | °C            | -25 - +60                                                                            |
| Enclosed                                               |              | °C            | -25 - 40                                                                             |
| Storage                                                |              | °C            | -40 - 80                                                                             |
| Mounting position                                      |              |               |                                                                                      |
| Mounting position                                      |              |               |  |
| <b>Mechanical shock resistance (IEC/EN 60068-2-27)</b> |              |               |                                                                                      |
| Half-sinusoidal shock, 10 ms                           |              |               |                                                                                      |
| Main contacts                                          |              |               |                                                                                      |
| N/O contact                                            |              | g             | 10                                                                                   |
| Auxiliary contacts                                     |              |               |                                                                                      |

|                                                                       |                                     |                 |                                      |
|-----------------------------------------------------------------------|-------------------------------------|-----------------|--------------------------------------|
| N/O contact                                                           |                                     | g               | 7                                    |
| N/C contact                                                           |                                     | g               | 5                                    |
| Degree of Protection                                                  |                                     |                 | IP00                                 |
| Protection against direct contact when actuated from front (EN 50274) |                                     |                 | Finger and back-of-hand proof        |
| Terminal capacity main cable                                          |                                     |                 |                                      |
| Solid                                                                 |                                     | mm <sup>2</sup> | 1 x (2.5 - 16)<br>2 x (2.5 - 16)     |
| Flexible with ferrule                                                 |                                     | mm <sup>2</sup> | 1 x (2.5 - 35)<br>2 x (2.5 - 25)     |
| Stranded                                                              |                                     | mm <sup>2</sup> | 1 x (16 - 50)<br>2 x (16 - 35)       |
| Solid or stranded                                                     |                                     | AWG             | 12 - 2                               |
| Flat conductor                                                        | Lamellenzahl<br>x Breite x<br>Dicke | mm              | 2 x (6 x 9 x 0.8)                    |
| Terminal capacity control circuit cables                              |                                     |                 |                                      |
| Solid                                                                 |                                     | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 4)     |
| Flexible with ferrule                                                 |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Solid or stranded                                                     |                                     | AWG             | 18 - 14                              |
| Main cable connection screw/bolt                                      |                                     |                 | M6                                   |
| Tightening torque                                                     |                                     | Nm              | 3.3                                  |
| Control circuit cable connection screw/bolt                           |                                     |                 | M3.5                                 |
| Tightening torque                                                     |                                     | Nm              | 1.2                                  |
| Tool                                                                  |                                     |                 |                                      |
| Main cable                                                            |                                     |                 |                                      |
| Pozidriv screwdriver                                                  |                                     | Size            | 2                                    |
| Standard screwdriver                                                  |                                     | mm              | 0.8 x 5.5<br>1 x 6                   |
| Control circuit cables                                                |                                     |                 |                                      |
| Pozidriv screwdriver                                                  |                                     | Size            | 2                                    |
| Standard screwdriver                                                  |                                     | mm              | 0.8 x 5.5<br>1 x 6                   |

### Main conducting paths

|                                       |                  |      |                                  |
|---------------------------------------|------------------|------|----------------------------------|
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 8000                             |
| Overvoltage category/pollution degree |                  |      | III/3                            |
| Rated insulation voltage              | U <sub>i</sub>   | V AC | 690                              |
| Rated operational voltage             | U <sub>e</sub>   | V AC | 690                              |
| Safe isolation to EN 61140            |                  |      |                                  |
| between coil and contacts             |                  | V AC | 440                              |
| between the contacts                  |                  | V AC | 440                              |
| Making capacity (cos φ)               | Up to 690 V      | A    | 560<br>According to IEC/EN 60947 |
| Breaking capacity                     |                  |      |                                  |
| 220 V 230 V                           |                  | A    | 400                              |
| 380 V 400 V                           |                  | A    | 400                              |
| 500 V                                 |                  | A    | 400                              |
| 660 V 690 V                           |                  | A    | 250                              |
| Short-circuit rating                  |                  |      |                                  |
| Short-circuit protection maximum fuse |                  |      |                                  |
| Type "2" coordination                 |                  |      |                                  |
| 400 V                                 | gG/gL 500 V      | A    | 63                               |
| 690 V                                 | gG/gL 690 V      | A    | 50                               |
| Type "1" coordination                 |                  |      |                                  |
| 400 V                                 | gG/gL 500 V      | A    | 125                              |
| 690 V                                 | gG/gL 690 V      | A    | 80                               |

### AC

|                           |  |  |  |
|---------------------------|--|--|--|
| AC-1                      |  |  |  |
| Rated operational current |  |  |  |

|                                                           |                |    |      |
|-----------------------------------------------------------|----------------|----|------|
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |    |      |
| Open                                                      |                |    |      |
| at 40 °C                                                  | $I_{th} = I_e$ | A  | 63   |
| at 50 °C                                                  | $I_{th} = I_e$ | A  | 60   |
| at 60 °C                                                  | $I_{th} = I_e$ | A  | 54   |
| enclosed                                                  | $I_{th}$       | A  | 50   |
| Conventional free air thermal current, 1 pole             |                |    |      |
| open                                                      | $I_{th}$       | A  | 162  |
| enclosed                                                  | $I_{th}$       | A  | 146  |
| AC-3                                                      |                |    |      |
| Rated operational current                                 |                |    |      |
| Open, 3-pole: 50 – 60 Hz                                  |                |    |      |
| 220 V 230 V                                               | $I_e$          | A  | 40   |
| 240 V                                                     | $I_e$          | A  | 40   |
| 380 V 400 V                                               | $I_e$          | A  | 40   |
| 415 V                                                     | $I_e$          | A  | 40   |
| 440V                                                      | $I_e$          | A  | 40   |
| 500 V                                                     | $I_e$          | A  | 40   |
| 660 V 690 V                                               | $I_e$          | A  | 25   |
| Motor rating                                              |                | P  | kWh  |
| 220 V 230 V                                               | P              | kW | 12.5 |
| 240V                                                      | P              | kW | 13.5 |
| 380 V 400 V                                               | P              | kW | 18.5 |
| 415 V                                                     | P              | kW | 24   |
| 440 V                                                     | P              | kW | 25   |
| 500 V                                                     | P              | kW | 28   |
| 660 V 690 V                                               | P              | kW | 23   |

## DC

|                                 |       |   |    |
|---------------------------------|-------|---|----|
| Rated operational current, open |       |   |    |
| DC-1                            |       |   |    |
| 60 V                            | $I_e$ | A | 63 |
| 110 V                           | $I_e$ | A | 63 |
| 220 V                           | $I_e$ | A | 63 |
| 440 V                           | $I_e$ | A | 5  |
| DC-3                            |       |   |    |
| 60 V                            | $I_e$ | A | 63 |
| 110 V                           | $I_e$ | A | 63 |
| 220 V                           | $I_e$ | A | 63 |
| 440 V                           | $I_e$ | A | 5  |
| DC-5                            |       |   |    |
| 60 V                            | $I_e$ | A | 63 |
| 110 V                           | $I_e$ | A | 50 |
| 220 V                           | $I_e$ | A | 38 |
| 440 V                           | $I_e$ | A | 5  |

## Current heat loss

|                    |  |    |    |
|--------------------|--|----|----|
| 3-pole at $I_{th}$ |  | W  | 16 |
| Impedance per pole |  | mΩ | 1  |

## Magnet systems

|                              |          |              |              |
|------------------------------|----------|--------------|--------------|
| Voltage tolerance            |          |              | $\times U_c$ |
| AC operated 50 Hz            | Pick-up  | $\times U_c$ | 0.8 - 1.1    |
| AC operated 50/60 Hz         |          | $\times U_c$ | 0.85 - 1.1   |
| Drop-out voltage AC operated | Drop-out | $\times U_c$ | 0.4 - 0.6    |
| DC operated                  | Pick-up  | $\times U_c$ | 0.7 - 1.2    |

|                                                                                            |          |                  |               |
|--------------------------------------------------------------------------------------------|----------|------------------|---------------|
| DC operated                                                                                | Drop-out | x U <sub>c</sub> | 0.2 - 0.6     |
| Power consumption of the coil in a cold state and 1.0 x U <sub>c</sub>                     |          |                  |               |
| AC operated 50/60 Hz                                                                       | Pick-up  | VA               | 150           |
| AC operated 50/60 Hz                                                                       | Pick-up  | W                | 95            |
| AC operated 50/60 Hz                                                                       | Sealing  | VA               | 16            |
| AC operated 50/60 Hz                                                                       | Sealing  | W                | 5.3<br>4.3    |
| DC operated                                                                                | Pick-up  | W                | 24            |
| DC operated                                                                                | Sealing  | W                | 0.5           |
| Duty factor                                                                                |          | % DF             | 100           |
| Switching times at 100 % U <sub>c</sub> (approximate values)                               |          |                  |               |
| Main contacts                                                                              |          |                  |               |
| AC operated                                                                                |          |                  |               |
| Closing delay                                                                              |          | ms               | 12 - 18       |
| Opening delay                                                                              |          | ms               | 8 - 13        |
| DC operated                                                                                |          |                  |               |
| Closing delay                                                                              |          | ms               | 54            |
| Opening delay                                                                              |          | ms               | 24            |
| Arcing time                                                                                |          | ms               | 10            |
| Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal). |          | mA               | $\frac{I}{1}$ |

## Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 63                                                                                                                               |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 5.5                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 16.5                                                                                                                             |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 4.1                                                                                                                              |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 60                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |

|                                     |  |  |                                                                                                          |
|-------------------------------------|--|--|----------------------------------------------------------------------------------------------------------|
| 10.12 Electromagnetic compatibility |  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| 10.13 Mechanical function           |  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


## Technical data ETIM 5.0


|                                                                                                                                                                                  |  |    |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----|------------------|
| Low-voltage industrial components (EG000017) / Magnet contactor, AC-switching (EC000066)                                                                                         |  |    |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss8-27-37-10-03 [AAB718011]) |  |    |                  |
| Rated control supply voltage Us at AC 50HZ                                                                                                                                       |  | V  | 0 - 0            |
| Rated control supply voltage Us at AC 60HZ                                                                                                                                       |  | V  | 12 - 600         |
| Rated control supply voltage Us at DC                                                                                                                                            |  | V  | 0 - 0            |
| Voltage type for actuating                                                                                                                                                       |  |    | AC               |
| Rated operation current Ie at AC-1, 400 V                                                                                                                                        |  | A  | 63               |
| Rated operation current Ie at AC-3, 400 V                                                                                                                                        |  | A  | 40               |
| Rated operation power at AC-3, 400 V                                                                                                                                             |  | kW | 18.5             |
| Rated operation current Ie at AC-4, 400 V                                                                                                                                        |  | A  | 25               |
| Rated operation power Ie at AC-4, 400 V                                                                                                                                          |  | kW | 12               |
| Modular version                                                                                                                                                                  |  |    | No               |
| Number of auxiliary contacts as normally open contact                                                                                                                            |  |    | 0                |
| Number of auxiliary contacts as normally closed contact                                                                                                                          |  |    | 0                |
| Connection type main current circuit                                                                                                                                             |  |    | Screw connection |
| Number of normally closed contacts as main contact                                                                                                                               |  |    | 0                |
| Number of main contacts as normally open contact                                                                                                                                 |  |    | 4                |

## Approvals

|                                      |  |  |                                                           |
|--------------------------------------|--|--|-----------------------------------------------------------|
| Product Standards                    |  |  | IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking |
| UL File No.                          |  |  | E29096                                                    |
| UL Category Control No.              |  |  | NLDX                                                      |
| CSA File No.                         |  |  | 012528                                                    |
| CSA Class No.                        |  |  | 2411-03, 3211-04                                          |
| North America Certification          |  |  | UL listed, CSA certified                                  |
| Specially designed for North America |  |  | No                                                        |


## Characteristics

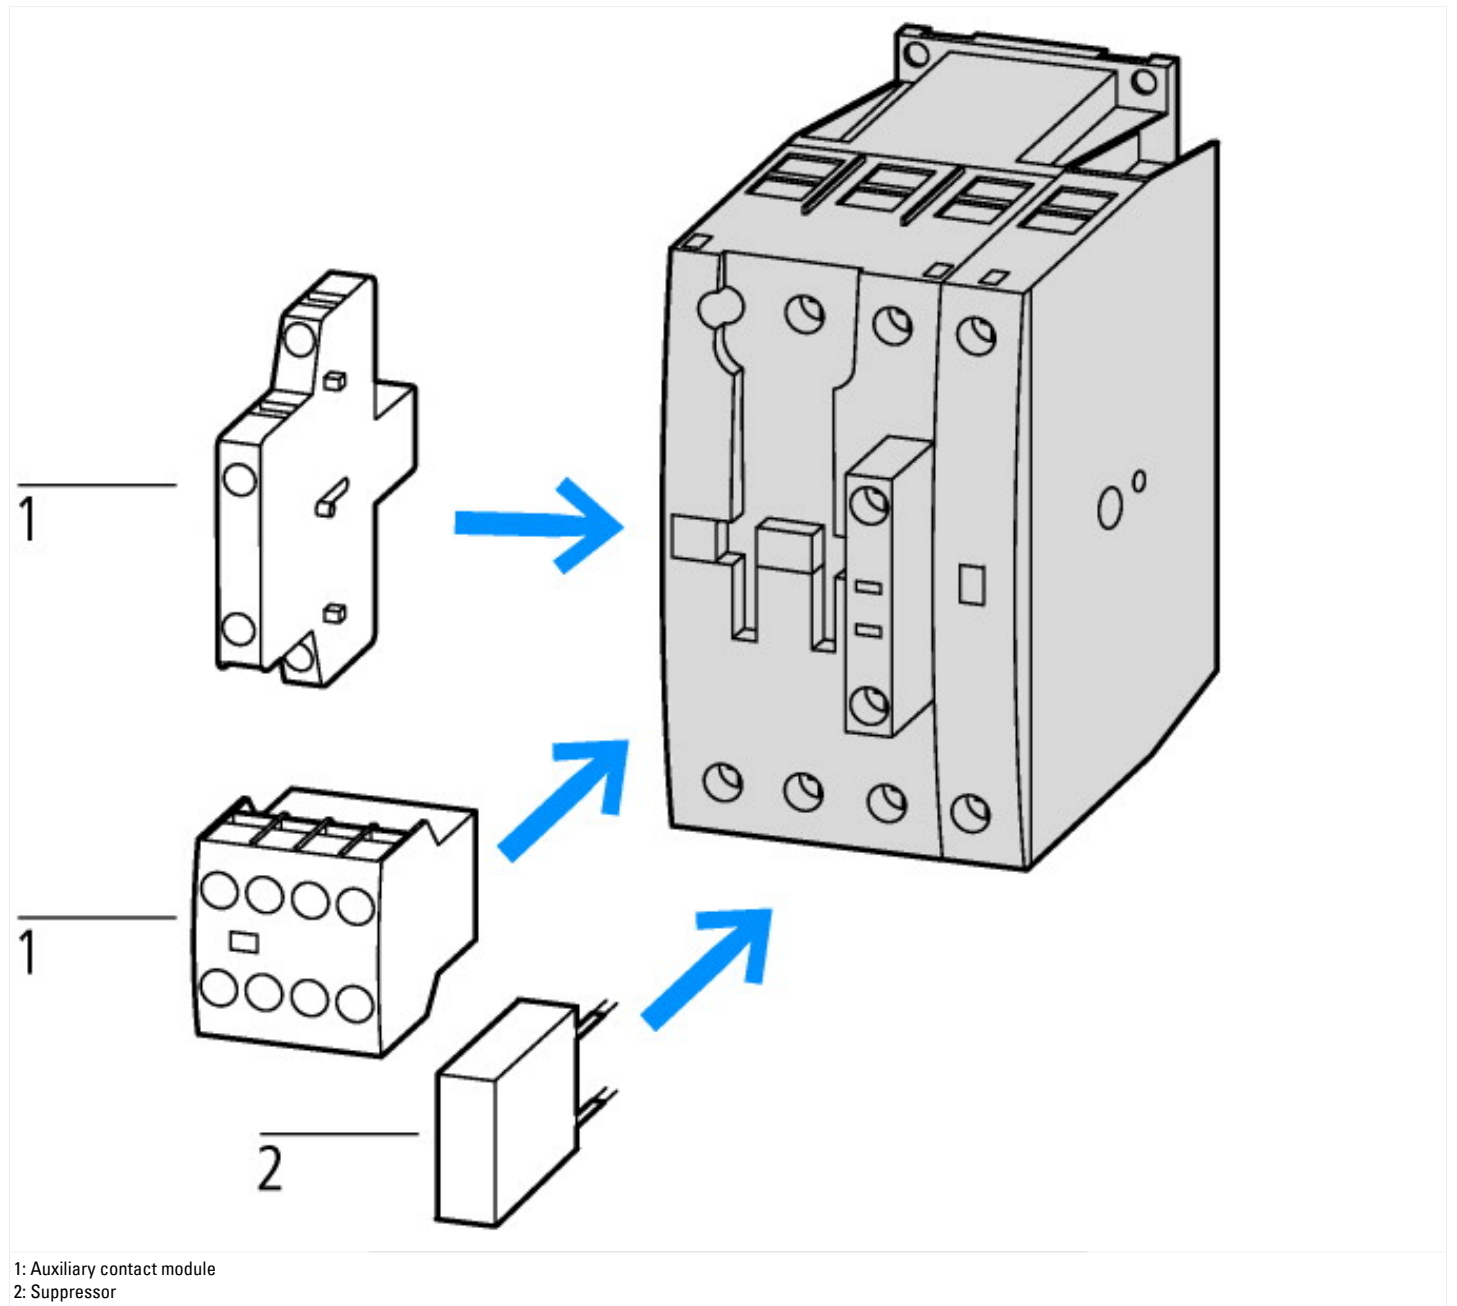

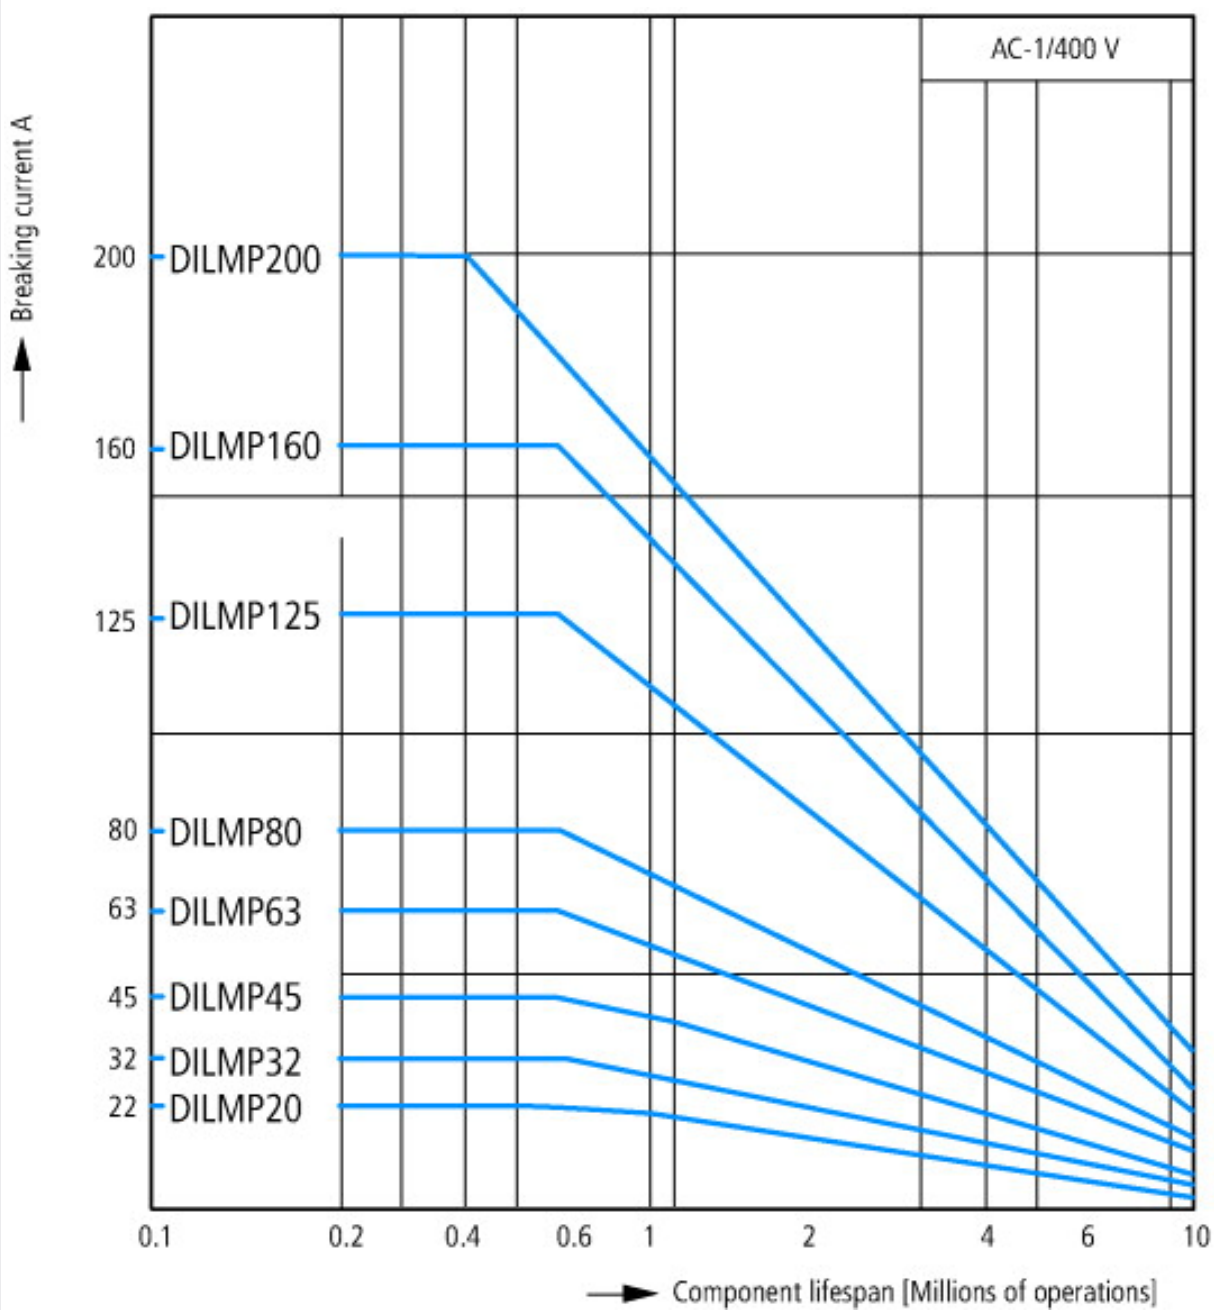


Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 × rated operational current  
 Switch off: 1 × rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat

## Dimensions

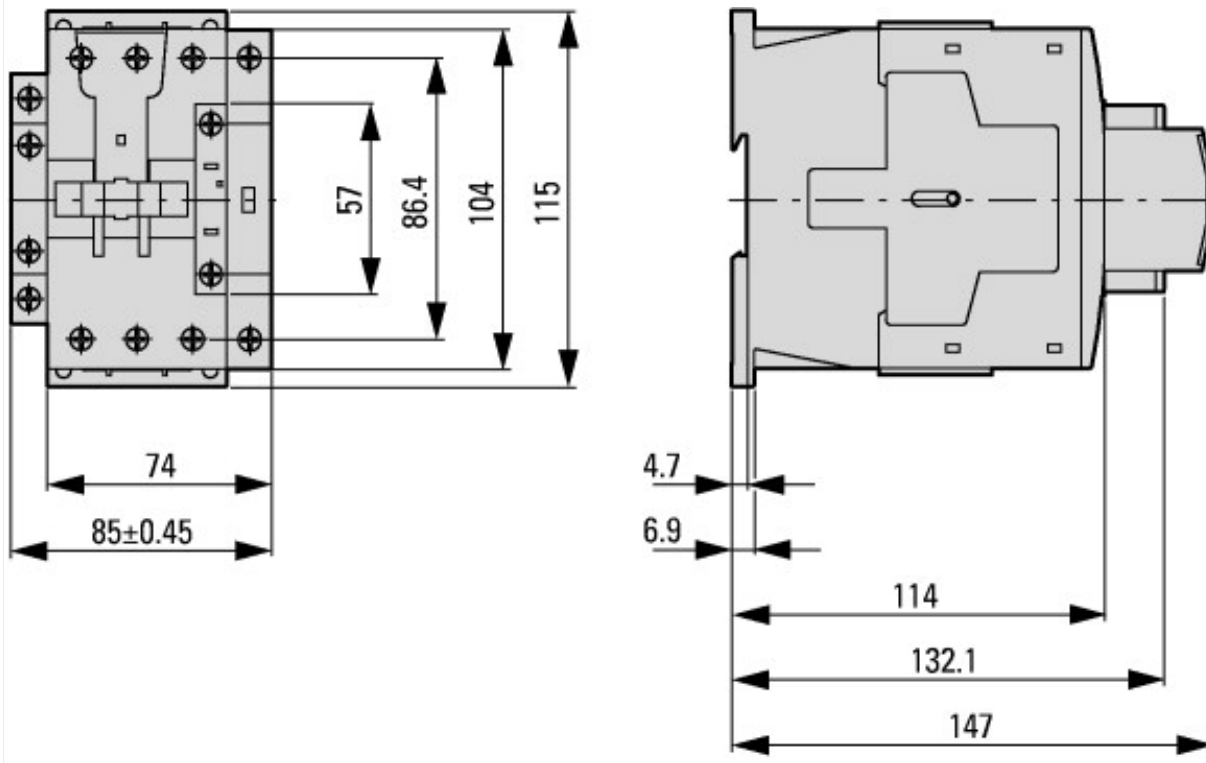

Contactors



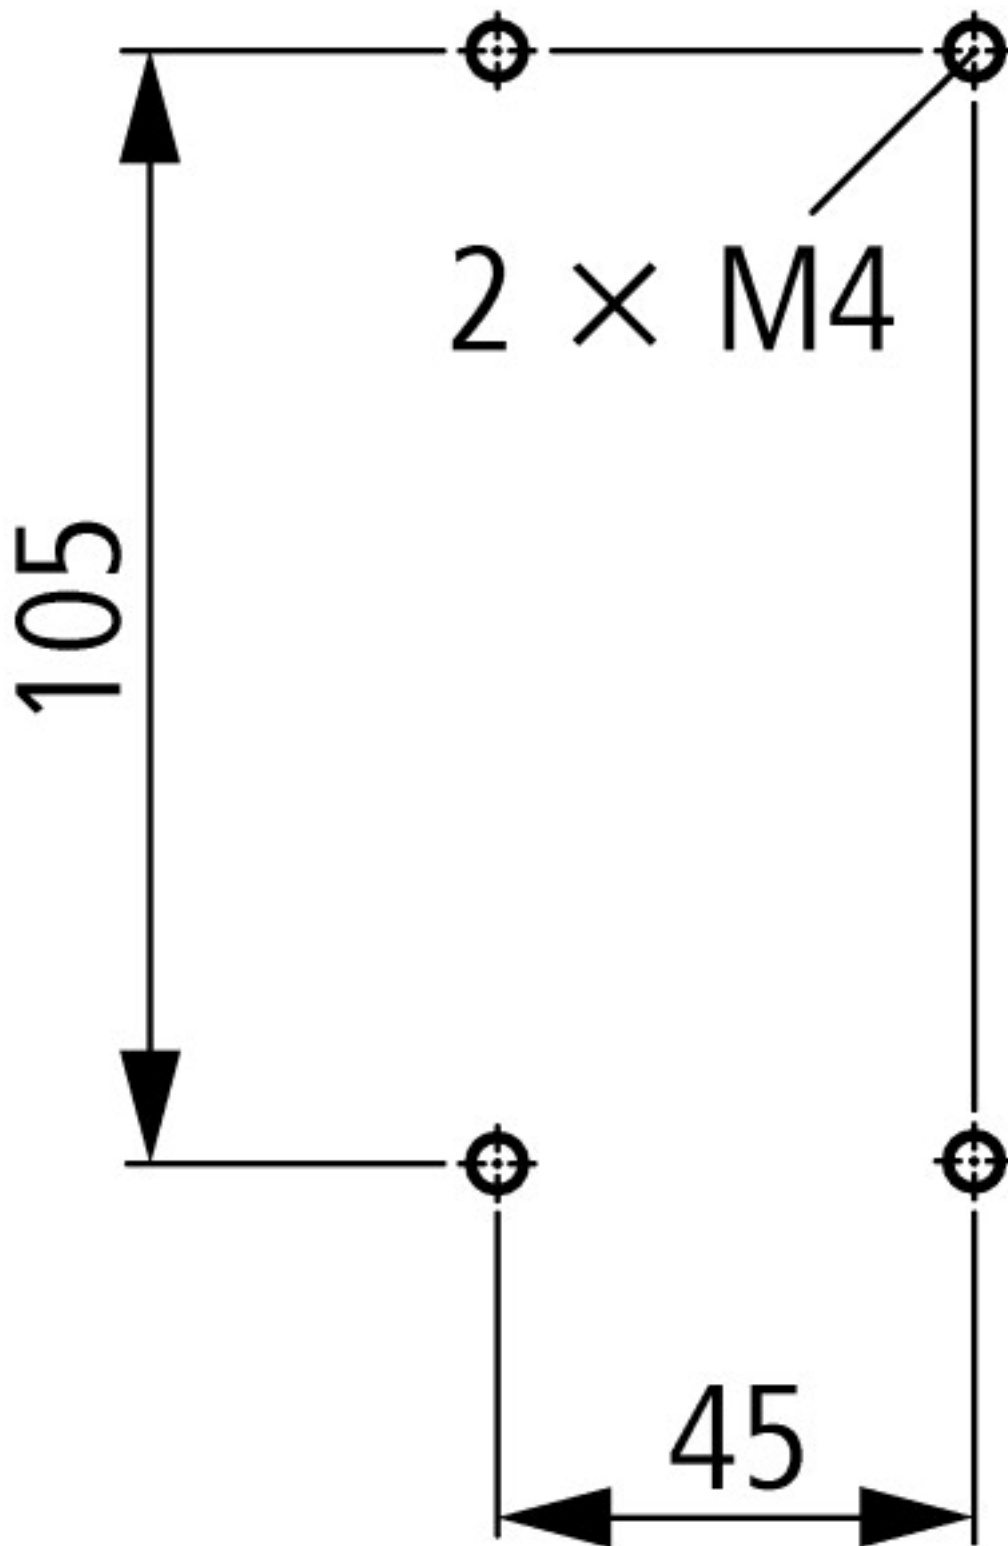

distance at side to earthed parts: 6 mm

DILMP63  
DILMP80

### Additional product information (links)

#### IL03407049Z (AWA2100-2356) 4 pole Contactor

IL03407049Z (AWA2100-2356) 4 pole Contactor [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407049Z2012\\_01.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407049Z2012_01.pdf)

UL/CSA: UL/CSA: Special Purpose Rating <http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=5.85>

Switchgear of Power Factor Correction Systems [http://www.moeller.net/binary/ver\\_techpapers/ver934en.pdf](http://www.moeller.net/binary/ver_techpapers/ver934en.pdf)

X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely [http://www.moeller.net/binary/ver\\_techpapers/ver938en.pdf](http://www.moeller.net/binary/ver_techpapers/ver938en.pdf)

Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions [http://www.moeller.net/binary/ver\\_techpapers/ver944en.pdf](http://www.moeller.net/binary/ver_techpapers/ver944en.pdf)

Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors [http://www.moeller.net/binary/ver\\_techpapers/ver949en.pdf](http://www.moeller.net/binary/ver_techpapers/ver949en.pdf)

|                                                                                                |                                                                                                                                   |
|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Motor starters and "Special Purpose Ratings" for the North American market                     | <a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a> |
| Switchgear for Luminaires                                                                      | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs                                                        | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |